



正基科技股份有限公司

SPECIFICATION

PRODUCT NAME : AP6276S

REVISION : 0.6

DATE : Feb. 24th , 2023

Customer APPROVED	
Company	
Representative Signature	

PREPARED	REVIEW			APPROVED	DCC ISSUE
	PM	QA	ET		



正基科技股份有限公司



AP6276S Data Sheet

Address:

8F, No.15-1, Zhonghua Road, Hsinchu Industrial Park, Hukou, Hsinchu,
Taiwan, 30352

Website: <http://www.ampak.com.tw/>



Revision

Revision	Date	Description	Revised By
0.1	2021/12/07	Preliminary Release	Richard
0.2	2022/03/04	Modify the Pin outline Dimension and Layout recommended footprint	Richard
0.3	2022/08/25	Modify 6GHz TX output power Modify 6GHz channel list	Richard
0.4	2022/11/29	Modify General Specification	Richard
0.5	2022/12/06	Modify Bluetooth Specification	Richard
0.6	2023/02/24	Modify General Specification	Richard

Contents


1. Introduction	2
1.1 Overview	2
1.2 Product Features	3
2. General Specification	4
2.1 General Specification	4
2.2 DC Characteristics	4
2.2.1 Absolute Maximum Ratings	4
2.2.2 Recommended Operating Rating	5
3. Wi-Fi RF Specification	6
3.1 2.4GHz RF Specification	6
3.2 5GHz RF Specification	9
3.3 6GHz RF Specification	24
4. Bluetooth Specification	27
4.1 Bluetooth Specification	27
5. Pin Definition	28
5.1 Pin Outline	28
5.2 Pin Assignment	29
6. Dimensions	31
6.1 Module Dimensions	31
6.2 Recommended footprint	32
7. External clock reference	33
8. Host Interface Timing Diagram	34
8.1 Power-up Sequence Timing Diagram	34
8.2 SDIO Interface Description	37
8.3 PCM Interface Description	43
8.4 UART Interface Description	49
9. Recommended Reflow Profile	51
10. Package Information	52
10.1 Label	52
10.2 Dimension	53
10.3 MSL Level / Storage Condition	55

1. Introduction

1.1 Overview

The AMPAK Technology® AP6276S is a fully Wi-Fi 6E(2.4/5/6GHz) and Bluetooth functionalities module with seamless roaming capabilities and advance security, also it could interact with different vendors' 802.11a/b/g/n/ac/ax 2x2 Access Points with MIMO standard and can accomplish up to speed of 1200Mbps with dual stream in 802.11ax to connect the wireless LAN. Furthermore AP6276S included SDIO interface for Wi-Fi, UART/ PCM interface for Bluetooth.

In addition, this compact module is a total solution for a combination of Wi-Fi + BT technologies. The module is specifically developed for tablet, OTT box and portable devices.

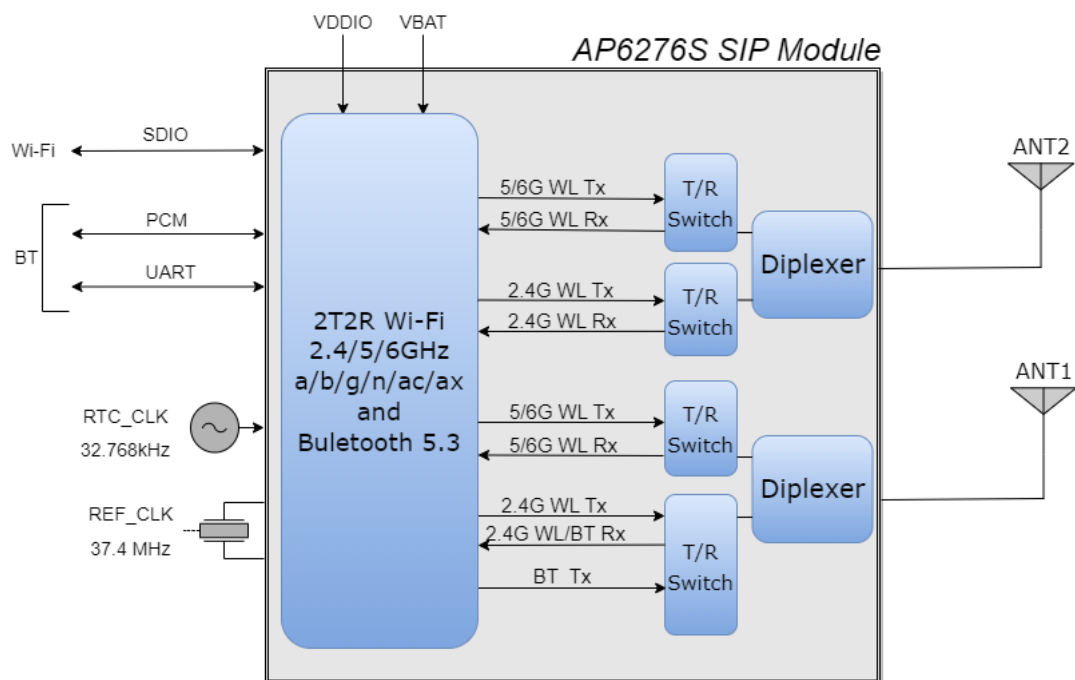

1.2 Product Features

IEEE 802.11 Key Features

- Lead Free design which is compliant with ROHS requirements.
- TX and RX low-density parity check (LDPC) support for improved range and power efficiency.
- Dual-stream spatial multiplexing up to 1200 Mbps data rate.
- 20/40/80 MHz channels for 5GHz and 6GHz (U-NII-5 and U-NII-6) radio, and 20MHz channels for 2.4GHz radio.
- Client MU-MIMO
- Supports standard SDIO v3.0, compatible with SDIO v2.0 HOST interfaces.

Bluetooth Key Features

- BT host digital interface:
 - HCI UART (up to 4 Mbps)
 - PCM for audio data
- Complies with Bluetooth Core Specification Version 5.3 with provisions for supporting future specifications. With Bluetooth Class 1 or Class2 transmitter operation.
- Supports extended synchronous connections (eSCO), for enhanced voice quality by allowing for retransmission of dropped packets.
- Adaptive frequency hopping (AFH) for reducing radio frequency interference.
A simplified block diagram of the module is depicted in the figure above.
- BT Core Specification Version 5.3, including the following support:
 - Low energy(LE) isochronous channels
 - LE power control
 - LE enhanced connection update
 - LE channel classification
 - LE audio

2. General Specification

2.1 General Specification

Model Name	AP6276S
Product Description	2T2R 802.11 a/b/g/n/ac/ax Wi-Fi 6E + BT 5.3 Module
Dimension	L x W : 15 x 13 (typical) mm , H : 1.85 (Maximum) mm
Wi-Fi Interface	Support SDIO V3.0/2.0
BT Interface	UART / PCM
Operating temperature	-30°C to 85°C
Storage temperature	-40°C to 125°C
Humidity	Operating Humidity 10% to 95% Non-Condensing

Note: The optimal RF performance specified in the data sheet, however, is guaranteed only -10 °C to +55 °C and 3.2V < VBAT < 4.8V without derating performance.

2.2 DC Characteristics

2.2.1 Absolute Maximum Ratings

Symbol	Description	Min.	Max.	Unit
VBAT	Input supply Voltage	-0.5	5.25	V
VDDIO	Digital/Bluetooth/SDIO/ I/O Voltage	-0.5	2.07	V

2.2.2 Recommended Operating Rating

The module requires two power supplies: VBAT and VDDIO.

Voltage rails	Min.	Typ.	Max.	Unit
VBAT	3.0	3.3	5.0	V
VDDIO	1.68	1.8	1.98	V

VBAT current consumption 1200mA(Peak), when VBAT = 3.3V

The module requires two power supplies: other Digital I/O Pins.

For VDDIO=1.8V	Min.	Max.	Unit
VIH = Input high voltage	$0.65 \times \text{VDDIO}$	NA	V
VIL = Input low voltage	NA	$0.4 \times \text{VDDIO}$	V
VOH = Output high voltage @ 2mA	$\text{VDDIO} - 0.4$	NA	V
VOL = Output low voltage @ 2mA	NA	0.4	V

Programmable 2mA to 16mA drive strength. Default is 10mA.

3. Wi-Fi RF Specification

3.1 2.4GHz RF Specification

Conditions : VBAT=3.3V ; VDDIO=1.8V ; Temp:25°C

Feature		Description								
WLAN Standard		IEEE 802.11 b/g/n/ax & Wi-Fi compliant								
Frequency Range		2.400 GHz ~ 2.4835 GHz (2.4GHz ISM Band)								
Number of Channels		2.4GHz：Ch1 ~ Ch13								
Modulation		802.11b：DQPSK、DBPSK、CCK 802.11g/n：OFDM /64-QAM、16-QAM、QPSK、BPSK 802.11ax：OFDMA /256-QAM、64-QAM、16-QAM、QPSK、BPSK								
Output Power(dBm) , tolerance ± 1.5 dB										
The transmit EVM quality & spectrum mask are compliant with IEEE 802.11 standard										
802.11b	1Mbps		2Mbps		5.5Mbps		11Mbps			
	19.5		19.5		19.5		19.5			
802.11g	6、9Mbps		12、18Mbps		24Mbps		36Mbps		48Mbps	
	18.5		17.5		17.5		17		17	
	54Mbps									
	17									
802.11n 20MHz	MCS0~2		MCS3		MCS4		MCS5		MCS6	
	18.5		17.5		17.5		17		17	
	MCS7									
	16									
802.11ax 20MHz	HE0~2		HE3		HE4		HE5		HE6	
	18.5		17.5		17.5		17		17	
	HE7		HE8		HE9					
	16		15		14					
802.11ax_20MHz SISO_OFDMA	HE4	26		17.5		HE9	26		14	
		52		17.5			52		14	
		106		17.5			106		14	
		242		17.5			242		14	
	HE5	26		17						
		52		17						
		106		17						
		242		17						

Note: The specifications of RF output power are subject to change to fulfill the safety regulation and requirements in end-user product.

Sensitivity, tolerance ± 2 dB				
CCK modulation PER $\leq 8\%$ 、OFDM modulation PER $\leq 10\%$				
802.11b	Data Rate	Spec.(dBm)		
	1Mbps	-98		
	2Mbps	-93		
	5.5Mbps	-91		
	11Mbps	-89		
802.11g SISO	Data Rate	Spec.(dBm)	Data Rate	Spec.(dBm)
	6Mbps	-93	24Mbps	-85
	9Mbps	-92	36Mbps	-82
	12Mbps	-91	48Mbps	-78
	18Mbps	-88	54Mbps	-76
802.11g MIMO	Data Rate	Spec.(dBm)	Data Rate	Spec.(dBm)
	6Mbps	-95	24Mbps	-87
	9Mbps	-94	36Mbps	-84
	12Mbps	-93	48Mbps	-81
	18Mbps	-90	54Mbps	-78
802.11n_20MHz SISO	Data Rate	Spec.(dBm)	Data Rate	Spec.(dBm)
	MCS0	-93	MCS4	-81
	MCS1	-89	MCS5	-79
	MCS2	-87	MCS6	-76
	MCS3	-84	MCS7	-76
802.11n_20MHz MIMO	Data Rate	Spec.(dBm)	Data Rate	Spec.(dBm)
	MCS0	-93	MCS5	-80
	MCS1	-92	MCS6	-78
	MCS2	-90	MCS7	-76
	MCS3	-87	MCS8	-92
	MCS4	-83	MCS15	-75
802.11ax_20MHz SISO	Data Rate	Spec.(dBm)	Data Rate	Spec.(dBm)
	HE0	-92	HE6	-75
	HE1	-88	HE7	-74
	HE2	-86	HE8	-71
	HE3	-83	HE9	-69

	HE4	-80		
	HE5	-77		
802.11ax_20MHz MIMO	Data Rate	Spec.(dBm)	Data Rate	Spec.(dBm)
	HE0	-91	HE6	-74
	HE1	-87	HE7	-73
	HE2	-85	HE8	-70
	HE3	-82	HE9	-68
	HE4	-79		
	HE5	-76		
Maximum Input Level	802.11b : -10 dBm			
	802.11g/n/ax : -20 dBm			

3.2 5GHz RF Specification

Conditions : VBAT=3.3V ; VDDIO=1.8V ; Temp:25°C

Feature		Description			
WLAN Standard		IEEE 802.11a/n/ac/ax & Wi-Fi compliant			
Frequency Range		5.15~5.25GHz、5.25~5.35GHz、5.47~5.725GHz、5.725~5.85GHz（5GHz UNII Band）			
Number of Channels		5.15~5.25GHz：Ch36 ~ Ch48 5.25~5.35GHz：Ch52 ~ Ch64 5.47~5.725GHz：Ch100 ~ Ch144 5.725~5.85GHz：Ch149 ~ Ch165			
Modulation		802.11a：OFDM /64-QAM、16-QAM、QPSK、BPSK 802.11n：OFDM /64-QAM、16-QAM、QPSK、BPSK 802.11ac：OFDM /256-QAM、64-QAM、16-QAM、QPSK、BPSK 802.11ax：OFDMA /1024-QAM、256-QAM、64-QAM、16-QAM、QPSK、BPSK			
Output Power(dBm) , tolerance ± 2 dB					
The transmit EVM quality & spectrum mask are compliant with IEEE 802.11 standard					
802.11a	Frequency (MHz)	6~9Mbps	12~18Mbps	24Mbps	36Mbps
	5150~5350	15.5	15.5	15.5	15.5
	5470~5725	15.5	15.5	15.5	15.5
	5725~5845	15.5	15.5	15.5	15.5
	Frequency (MHz)	48Mbps	54Mbps		
	5150~5350	15.5	15.5		
	5470~5725	15.5	15.5		
	5725~5845	15.5	15.5		
802.11n 20MHz	Frequency (MHz)	MCS0~2	MCS3	MCS4	MCS5
	5150~5350	15.5	15.5	15.5	15.5
	5470~5725	15.5	15.5	15.5	15.5
	5725~5845	15.5	15.5	15.5	15.5
	Frequency (MHz)	MCS6	MCS7		
	5150~5350	15.5	14.5		
	5470~5725	15.5	14.5		
	5725~5845	15.5	14.5		

802.11n 40MHz	Frequency (MHz)	MCS0~2	MCS3	MCS4	MCS5
	5150~5350	15.5	15.5	15.5	15.5
	5470~5725	15	15	15	15
	5725~5845	15	15	15	15
	Frequency (MHz)	MCS6	MCS7		
	5150~5350	15	15		
	5470~5725	14.5	14.5		
	5725~5845	14.5	14.5		
802.11ac 20MHz	Frequency (MHz)	MCS0~2	MCS3	MCS4	MCS5
	5150~5350	15.5	15.5	15.5	15.5
	5470~5725	15.5	15.5	15.5	15.5
	5725~5845	15.5	15.5	15.5	15.5
	Frequency (MHz)	MCS6	MCS7	MCS8	
	5150~5350	15.5	14.5	12.5	
	5470~5725	15.5	14.5	12.5	
	5725~5845	15.5	14.5	12.5	
802.11ac 40MHz	Frequency (MHz)	MCS0~2	MCS3	MCS4	MCS5
	5150~5350	15.5	15.5	15.5	15.5
	5470~5725	15	15	15	15
	5725~5845	15	15	15	15
	Frequency (MHz)	MCS6	MCS7	MCS8	MCS9
	5150~5350	15	15	13.5	11
	5470~5725	14.5	14.5	13	10
	5725~5845	14.5	14.5	13	10
802.11ac 80MHz	Frequency (MHz)	MCS0~2	MCS3	MCS4	MCS5
	5150~5350	15	15	15	15
	5470~5725	15	15	15	15
	5725~5845	15	15	15	15
	Frequency (MHz)	MCS6	MCS7	MCS8	MCS9
	5150~5350	14.5	14.5	11	11
	5470~5725	14.5	14.5	10	10
	5725~5845	14.5	14.5	10	10
802.11ax 20MHz	Frequency (MHz)	HE0~2	HE3	HE4	HE5
	5150~5350	15.5	15.5	15.5	15.5
	5470~5725	15.5	15.5	15.5	15.5
	5725~5845	15.5	15.5	15.5	15.5

802.11ax 20MHz	Frequency (MHz)	HE6	HE7	HE8	HE9
	5150~5350	15.5	14.5	12.5	12.5
	5470~5725	15.5	14.5	12.5	12.5
	5725~5845	15.5	14.5	12.5	12.5
	Frequency (MHz)	HE10	HE11		
	5150~5350	10.5	10.5		
	5470~5725	10	10		
	5725~5845	10	10		
802.11ax 40MHz	Frequency (MHz)	HE0~2	HE3	HE4	HE5
	5150~5350	15.5	15.5	15.5	15.5
	5470~5725	15	15	15	15
	5725~5845	15	15	15	15
	Frequency (MHz)	HE6	HE7	HE8	HE9
	5150~5350	15	15	13.5	11
	5470~5725	14.5	14.5	13	10
	5725~5845	14.5	14.5	13	10
	Frequency (MHz)	HE10	HE11		
	5150~5350	9	9		
	5470~5725	8	8		
	5725~5845	8	8		
802.11ax 80MHz	Frequency (MHz)	HE0~2	HE3	HE4	HE5
	5150~5350	15	15	15	15
	5470~5725	15	15	15	15
	5725~5845	15	15	15	15
	Frequency (MHz)	HE6	HE7	HE8	HE9
	5150~5350	14.5	14.5	11	11
	5470~5725	14.5	14.5	10	10
	5725~5845	14.5	14.5	10	10
	Frequency (MHz)	HE10	HE11		
	5150~5350	9	9		
	5470~5725	9	9		
	5725~5845	9	9		

Note: The specifications of RF output power are subject to change to fulfill the safety regulation and requirements in end-user product.

802.11ax_20MHz SISO_OFDMA	Dara rate	Tones	Frequency	Spec.(dBm)
	HE0	26	5150~5350	15.5
			5470~5725	15.5
			5725~5845	15.5
		52	5150~5350	15.5
			5470~5725	15.5
			5725~5845	15.5
		106	5150~5350	15.5
			5470~5725	15.5
			5725~5845	15.5
		242	5150~5350	14.5
			5470~5725	14
			5725~5845	14
	HE1~2	26	5150~5350	15.5
			5470~5725	15.5
			5725~5845	15.5
		52	5150~5350	15.5
			5470~5725	15.5
			5725~5845	15.5
		106	5150~5350	15.5
			5470~5725	15.5
			5725~5845	15.5
		242	5150~5350	14.5
			5470~5725	14
			5725~5845	14
	HE3~4	26	5150~5350	15.5
			5470~5725	15.5
			5725~5845	15.5
		52	5150~5350	15.5
			5470~5725	15.5
			5725~5845	15.5
		106	5150~5350	15.5
			5470~5725	15.5
			5725~5845	15.5
		242	5150~5350	14.5
			5470~5725	14
			5725~5845	14

	HE5~7	26	5150~5350	14.5
			5470~5725	14.5
			5725~5845	14.5
		52	5150~5350	14.5
			5470~5725	14.5
			5725~5845	14.5
		106	5150~5350	14.5
			5470~5725	14.5
			5725~5845	14.5
		242	5150~5350	14.5
			5470~5725	14
			5725~5845	14
	HE8~9	26	5150~5350	12.5
			5470~5725	12.5
			5725~5845	12.5
		52	5150~5350	12.5
			5470~5725	12.5
			5725~5845	12.5
		106	5150~5350	12.5
			5470~5725	12.5
			5725~5845	12.5
		242	5150~5350	12.5
			5470~5725	12.5
			5725~5845	12.5
	HE10~11	242	5150~5350	10
			5470~5725	9.5
			5725~5845	9.5

	Dara rate	Tones	Frequency	Spec.(dBm)
802.11ax_40MHz SISO_OFDMA	HE0	26	5150~5350	15.5
			5470~5725	15
			5725~5845	15
		52	5150~5350	15.5
			5470~5725	15
			5725~5845	15
		106	5150~5350	15.5
			5470~5725	15
			5725~5845	15
		242	5150~5350	15.5
			5470~5725	15
			5725~5845	15
		484	5150~5350	14.5
			5470~5725	14.5
			5725~5845	14.5
	HE1~2	26	5150~5350	15.5
			5470~5725	15
			5725~5845	15
		52	5150~5350	15.5
			5470~5725	15
			5725~5845	15
		106	5150~5350	15.5
			5470~5725	15
			5725~5845	15
		242	5150~5350	15.5
			5470~5725	15
			5725~5845	15
		484	5150~5350	14.5
			5470~5725	14.5
			5725~5845	14.5

	HE3~4	26	5150~5350	15.5
			5470~5725	15
			5725~5845	15
		52	5150~5350	15.5
			5470~5725	15
			5725~5845	15
		106	5150~5350	15.5
			5470~5725	15
			5725~5845	15
		242	5150~5350	15.5
			5470~5725	15
			5725~5845	15
		484	5150~5350	14.5
			5470~5725	14.5
			5725~5845	14.5
	HE5~7	26	5150~5350	15.5
			5470~5725	15
			5725~5845	15
		52	5150~5350	15.5
			5470~5725	15
			5725~5845	15
		106	5150~5350	15.5
			5470~5725	15
			5725~5845	15
		242	5150~5350	15.5
			5470~5725	15
			5725~5845	15
		484	5150~5350	14.5
			5470~5725	14.5
			5725~5845	14.5
	HE8~9	26	5150~5350	12
			5470~5725	12
			5725~5845	12
		52	5150~5350	12
			5470~5725	12
			5725~5845	12
		106	5150~5350	12

			5470~5725	12
			5725~5845	12
		242	5150~5350	12
			5470~5725	12
			5725~5845	12
		484	5150~5350	12
			5470~5725	12
			5725~5845	12
	HE10~11	242	5150~5350	10.5
			5470~5725	10
			5725~5845	10
		484	5150~5350	9.5
			5470~5725	9
			5725~5845	9

	Dara rate	Tones	Frequency	Spec.(dBm)
802.11ax_80MHz SISO_OFDMA	HE0	26	5150~5350	15.5
			5470~5725	15
			5725~5845	15
		52	5150~5350	15.5
			5470~5725	15
			5725~5845	15
		106	5150~5350	15.5
			5470~5725	15
			5725~5845	15
		242	5150~5350	15.5
			5470~5725	15
			5725~5845	15
		484	5150~5350	15.5
			5470~5725	15
			5725~5845	15
		996	5150~5350	15.5
			5470~5725	15
			5725~5845	15
	HE1~2	26	5150~5350	15.5
			5470~5725	15
			5725~5845	15
		52	5150~5350	15.5
			5470~5725	15
			5725~5845	15
		106	5150~5350	15.5
			5470~5725	15
			5725~5845	15
		242	5150~5350	15.5
			5470~5725	15
			5725~5845	15
		484	5150~5350	15.5
			5470~5725	15
			5725~5845	15
		996	5150~5350	15.5
			5470~5725	15
			5725~5845	15

	HE3~4	26	5150~5350	15.5
			5470~5725	15
			5725~5845	15
		52	5150~5350	15.5
			5470~5725	15
			5725~5845	15
		106	5150~5350	15.5
			5470~5725	15
			5725~5845	15
		242	5150~5350	15.5
			5470~5725	15
			5725~5845	15
		484	5150~5350	15.5
			5470~5725	15
			5725~5845	15
		996	5150~5350	15.5
			5470~5725	15
			5725~5845	15
	HE5~7	26	5150~5350	15.5
			5470~5725	15
			5725~5845	15
		52	5150~5350	15.5
			5470~5725	15
			5725~5845	15
		106	5150~5350	15.5
			5470~5725	15
			5725~5845	15
		242	5150~5350	15.5
			5470~5725	15
			5725~5845	15
		484	5150~5350	15.5
			5470~5725	15
			5725~5845	15
		996	5150~5350	14.5
			5470~5725	14.5
			5725~5845	14.5

	HE8~9	26	5150~5350	12.5
			5470~5725	12.5
			5725~5845	12.5
		52	5150~5350	12.5
			5470~5725	12.5
			5725~5845	12.5
		106	5150~5350	12.5
			5470~5725	12.5
			5725~5845	12.5
		242	5150~5350	12
			5470~5725	12
			5725~5845	12
		484	5150~5350	12
			5470~5725	12
			5725~5845	12
		996	5150~5350	12
			5470~5725	12
			5725~5845	12
	HE10~11	242	5150~5350	10
			5470~5725	9.5
			5725~5845	9.5
		484	5150~5350	10
			5470~5725	9.5
			5725~5845	9.5
		996	5150~5350	9
			5470~5725	9
			5725~5845	9

Sensitivity, tolerance ± 2 dB , OFDM modulation PER $\leq 10\%$

802.11a SISO	Data Rate	Spec.(dBm)	Data Rate	Spec.(dBm)
	6Mbps	-90.5	24Mbps	-83
	9Mbps	-90	36Mbps	-80
	12Mbps	-88	48Mbps	-75
	18Mbps	-86	54Mbps	-73
802.11a MIMO	Data Rate	Spec.(dBm)	Data Rate	Spec.(dBm)
	6Mbps	-92	24Mbps	-86
	9Mbps	-91	36Mbps	-83
	12Mbps	-90	48Mbps	-78
	18Mbps	-89	54Mbps	-77
802.11n_20MHz SISO	Data Rate	Spec.(dBm)	Data Rate	Spec.(dBm)
	MCS0	-90	MCS4	-79
	MCS1	-88	MCS5	-76
	MCS2	-86	MCS6	-73
	MCS3	-83	MCS7	-72
802.11n_20MHz MIMO	Data Rate	Spec.(dBm)	Data Rate	Spec.(dBm)
	MCS0	-92	MCS5	-78
	MCS1	-91	MCS6	-76
	MCS2	-89	MCS7	-75
	MCS3	-86	MCS8	-90
	MCS4	-82	MCS15	-71
802.11n_40MHz SISO	Data Rate	Spec.(dBm)	Data Rate	Spec.(dBm)
	MCS0	-88	MCS4	-77
	MCS1	-86	MCS5	-72
	MCS2	-83	MCS6	-70
	MCS3	-80	MCS7	-69
802.11n_40MHz MIMO	Data Rate	Spec.(dBm)	Data Rate	Spec.(dBm)
	MCS0	-88	MCS5	-75
	MCS1	-88	MCS6	-73
	MCS2	-86	MCS7	-72
	MCS3	-83	MCS8	-87
	MCS4	-79	MCS15	-68

802.11ac_20MHz SISO	Data Rate	Spec.(dBm)	Data Rate	Spec.(dBm)
	MCS0	-90	MCS5	-75
	MCS1	-88	MCS6	-73
	MCS2	-86	MCS7	-70
	MCS3	-83	MCS8	-68
	MCS4	-79		
802.11ac_20MHz MIMO	Data Rate	Spec.(dBm)	Data Rate	Spec.(dBm)
	MCS0,NSS=1	-92	MCS6,NSS=1	-76
	MCS1,NSS=1	-91	MCS7,NSS=1	-75
	MCS2,NSS=1	-88	MCS8,NSS=1	-72
	MCS3,NSS=1	-85	MCS0,NSS=2	-89
	MCS4,NSS=1	-82	MCS8,NSS=2	-67
	MCS5,NSS=1	-77		
802.11ac_40MHz SISO	Data Rate	Spec.(dBm)	Data Rate	Spec.(dBm)
	MCS0	-88	MCS5	-72
	MCS1	-86	MCS6	-70
	MCS2	-83	MCS7	-69
	MCS3	-80	MCS8	-65
	MCS4	-76	MCS9	-64
802.11ac_40MHz MIMO	Data Rate	Spec.(dBm)	Data Rate	Spec.(dBm)
	MCS0,NSS=1	-90	MCS6,NSS=1	-73
	MCS1,NSS=1	-88	MCS7,NSS=1	-72
	MCS2,NSS=1	-86	MCS8,NSS=1	-68
	MCS3,NSS=1	-82	MCS9,NSS=1	-66
	MCS4,NSS=1	-79	MCS0,NSS=2	-87
	MCS5,NSS=1	-77	MCS9,NSS=2	-63
802.11ac_80MHz SISO	Data Rate	Spec.(dBm)	Data Rate	Spec.(dBm)
	MCS0	-85	MCS5	-68
	MCS1	-82	MCS6	-67
	MCS2	-79	MCS7	-65
	MCS3	-76	MCS8	-62
	MCS4	-73	MCS9	-61

802.11ac_80MHz MIMO	Data Rate	Spec.(dBm)	Data Rate	Spec.(dBm)
	MCS0,NSS=1	-87	MCS6,NSS=1	-70
	MCS1,NSS=1	-85	MCS7,NSS=1	-68
	MCS2,NSS=1	-82	MCS8,NSS=1	-66
	MCS3,NSS=1	-79	MCS9,NSS=1	-63
	MCS4,NSS=1	-76	MCS0,NSS=2	-84
	MCS5,NSS=1	-71	MCS9,NSS=2	-60
802.11ax_20MHz SISO	Data Rate	Spec.(dBm)	Data Rate	Spec.(dBm)
	HE0	-90	HE6	-73
	HE1	-88	HE7	-70
	HE2	-86	HE8	-68
	HE3	-83	HE9	-64
	HE4	-79	HE10	-59
	HE5	-75	HE11	-57
802.11ax_20MHz MIMO	Data Rate	Spec.(dBm)	Data Rate	Spec.(dBm)
	HE0	-90	HE6	-73
	HE1	-88	HE7	-70
	HE2	-86	HE8	-68
	HE3	-83	HE9	-64
	HE4	-79	HE10	-59
	HE5	-75	HE11	-56
802.11ax_40MHz SISO	Data Rate	Spec.(dBm)	Data Rate	Spec.(dBm)
	HE0	-88	HE6	-70
	HE1	-86	HE7	-69
	HE2	-83	HE8	-65
	HE3	-80	HE9	-64
	HE4	-76	HE10	-60
	HE5	-72	HE11	-55
802.11ax_40MHz MIMO	Data Rate	Spec.(dBm)	Data Rate	Spec.(dBm)
	HE0	-87	HE6	-70
	HE1	-86	HE7	-69
	HE2	-83	HE8	-65
	HE3	-80	HE9	-64
	HE4	-76	HE10	-60
	HE5	-72	HE11	-55

802.11ax_80MHz SISO	Data Rate	Spec.(dBm)	Data Rate	Spec.(dBm)
	HE0	-85	HE6	-67
	HE1	-82	HE7	-65
	HE2	-79	HE8	-62
	HE3	-76	HE9	-61
	HE4	-73	HE10	-57
	HE5	-68	HE11	-53
802.11ax_80MHz MIMO	Data Rate	Spec.(dBm)	Data Rate	Spec.(dBm)
	HE0	-84	HE6	-67
	HE1	-82	HE7	-65
	HE2	-79	HE8	-62
	HE3	-76	HE9	-61
	HE4	-73	HE10	-57
	HE5	-68	HE11	-52
Maximum Input Level	802.11a/n/ac/ax : -30 dBm			

3.3 6GHz RF Specification

Conditions : VBAT=3.3V ; VDDIO=1.8V ; Temp:25°C

Feature		Description			
WLAN Standard		IEEE 802.11ax			
Frequency Range		5.925~6525GHz (6GHz U-NII5 & U-NII6 Band)			
Number of Channels		5955~5415MHz：6G1 ~ Ch93 6435~6515GHz：Ch97 ~ Ch113			
Modulation		802.11ax：OFDMA /1024-QAM、256-QAM、64-QAM、16-QAM、QPSK、BPSK			
Output Power(dBm) , tolerance ± 2 dB					
The transmit EVM quality & spectrum mask are compliant with IEEE 802.11 standard					
802.11ax 20MHz	Frequency (MHz)	HE0~2	HE3	HE4	HE5
	5955~5415	14.5	14	13.5	13.5
	6435~6515	14.5	14	13.5	13.5
	Frequency (MHz)	HE6	HE7	HE8	HE9
	5955~5415	13.5	12.5	10.5	10.5
	6435~6515	13.5	12.5	10.5	10.5
	Frequency (MHz)	HE10	HE11		
	5955~5415	8.5	8.5		
	6435~6515	8.5	8.5		
802.11ax 40MHz	Frequency (MHz)	HE0~2	HE3	HE4	HE5
	5955~5415	14.5	14	13	13
	6435~6515	14.5	14	13	13
	Frequency (MHz)	HE6	HE7	HE8	HE9
	5955~5415	12.5	12.5	11	8
	6435~6515	12.5	12.5	11	8
	Frequency (MHz)	HE10	HE11		
	5955~5415	7	7		
	6435~6515	7	7		

802.11ax 80MHz	Frequency (MHz)	HE0~2	HE3	HE4	HE5
	5955~5415	14.5	14	13	13
	6435~6515	14.5	14	13	13
	Frequency (MHz)	HE6	HE7	HE8	HE9
	5955~5415	12.5	12.5	8	8
	6435~6515	12.5	12.5	8	8
	Frequency (MHz)	HE10	HE11		
	5955~5415	7	7		
	6435~6515	7	7		

Note: The specifications of RF output power are subject to change to fulfill the safety regulation and requirements in end-user product.

Sensitivity, tolerance ± 2 dB, OFDM modulation PER $\leq 10\%$

802.11ax_20MHz SISO	Data Rate	Spec.(dBm)	Data Rate	Spec.(dBm)
	HE0	-88	HE6	-71
	HE1	-86	HE7	-68
	HE2	-84	HE8	-66
	HE3	-83	HE9	-62
	HE4	-77	HE10	-57
	HE5	-73	HE11	-55
802.11ax_20MHz MIMO	Data Rate	Spec.(dBm)	Data Rate	Spec.(dBm)
	HE0	-88	HE6	-71
	HE1	-86	HE7	-68
	HE2	-84	HE8	-66
	HE3	-81	HE9	-62
	HE4	-77	HE10	-57
	HE5	-73	HE11	-54
802.11ax_40MHz SISO	Data Rate	Spec.(dBm)	Data Rate	Spec.(dBm)
	HE0	-86	HE6	-68
	HE1	-84	HE7	-67
	HE2	-81	HE8	-63
	HE3	-78	HE9	-62
	HE4	-74	HE10	-68
	HE5	-70	HE11	-53

802.11ax_40MHz MIMO	Data Rate	Spec.(dBm)	Data Rate	Spec.(dBm)
	HE0	-85	HE6	-68
	HE1	-84	HE7	-67
	HE2	-81	HE8	-63
	HE3	-78	HE9	-62
	HE4	-74	HE10	-58
	HE5	-70	HE11	-53
802.11ax_80MHz SISO	Data Rate	Spec.(dBm)	Data Rate	Spec.(dBm)
	HE0	-83	HE6	-65
	HE1	-80	HE7	-63
	HE2	-77	HE8	-60
	HE3	-74	HE9	-59
	HE4	-71	HE10	-55
	HE5	-66	HE11	-51
802.11ax_80MHz MIMO	Data Rate	Spec.(dBm)	Data Rate	Spec.(dBm)
	HE0	-82	HE6	-65
	HE1	-80	HE7	-63
	HE2	-77	HE8	-60
	HE3	-74	HE9	-59
	HE4	-71	HE10	-55
	HE5	-66	HE11	-50
Maximum Input Level	802.11ax : -30dBm			

4. Bluetooth Specification

4.1 Bluetooth Specification


Conditions : VBAT=3.3V ; VDDIO=1.8V ; Temp:25°C

Feature	Description
General Specification	
Bluetooth Standard	BDR 、 EDR(2Mbps & 3Mbps) 、 LE(1/2Mbps) 、 LELR(128/512Kbps)
Host Interface	UART
Frequency Band	2402 MHz ~ 2480 MHz
Number of Channels	79 channels for classic 、 40 channels for BLE
Modulation	GFSK, $\pi/4$ -DQPSK, 8DPSK
RF Specification	
Output Power , tolerance ± 2 dB	
	CL1 (dBm)
BDR Output Power	6
EDR Output Power	6
BLE Output Power	6
Sensitivity, tolerance ± 2 dB	
Sensitivity @ BER=0.1% for GFSK (1Mbps)	-88 dBm
Sensitivity @ BER=0.01% for $\pi/4$ -DQPSK (2Mbps)	-91 dBm
Sensitivity @ BER=0.01% for 8DPSK (3Mbps)	-85 dBm
Sensitivity @ PER=30.8% for LE (1Mbps)	-90 dBm
Sensitivity @ PER=30.8% for 2LE (2Mbps)	-91dBm
Maximum Input Level	GFSK (1Mbps):-20dBm
	$\pi/4$ -DQPSK (2Mbps) :-20dBm
	8DPSK (3Mbps) :-20dBm

Note* : The Bluetooth BDR output power is able to be configured by firmware (hcd file).

5. Pin Definition

5.1 Pin Outline

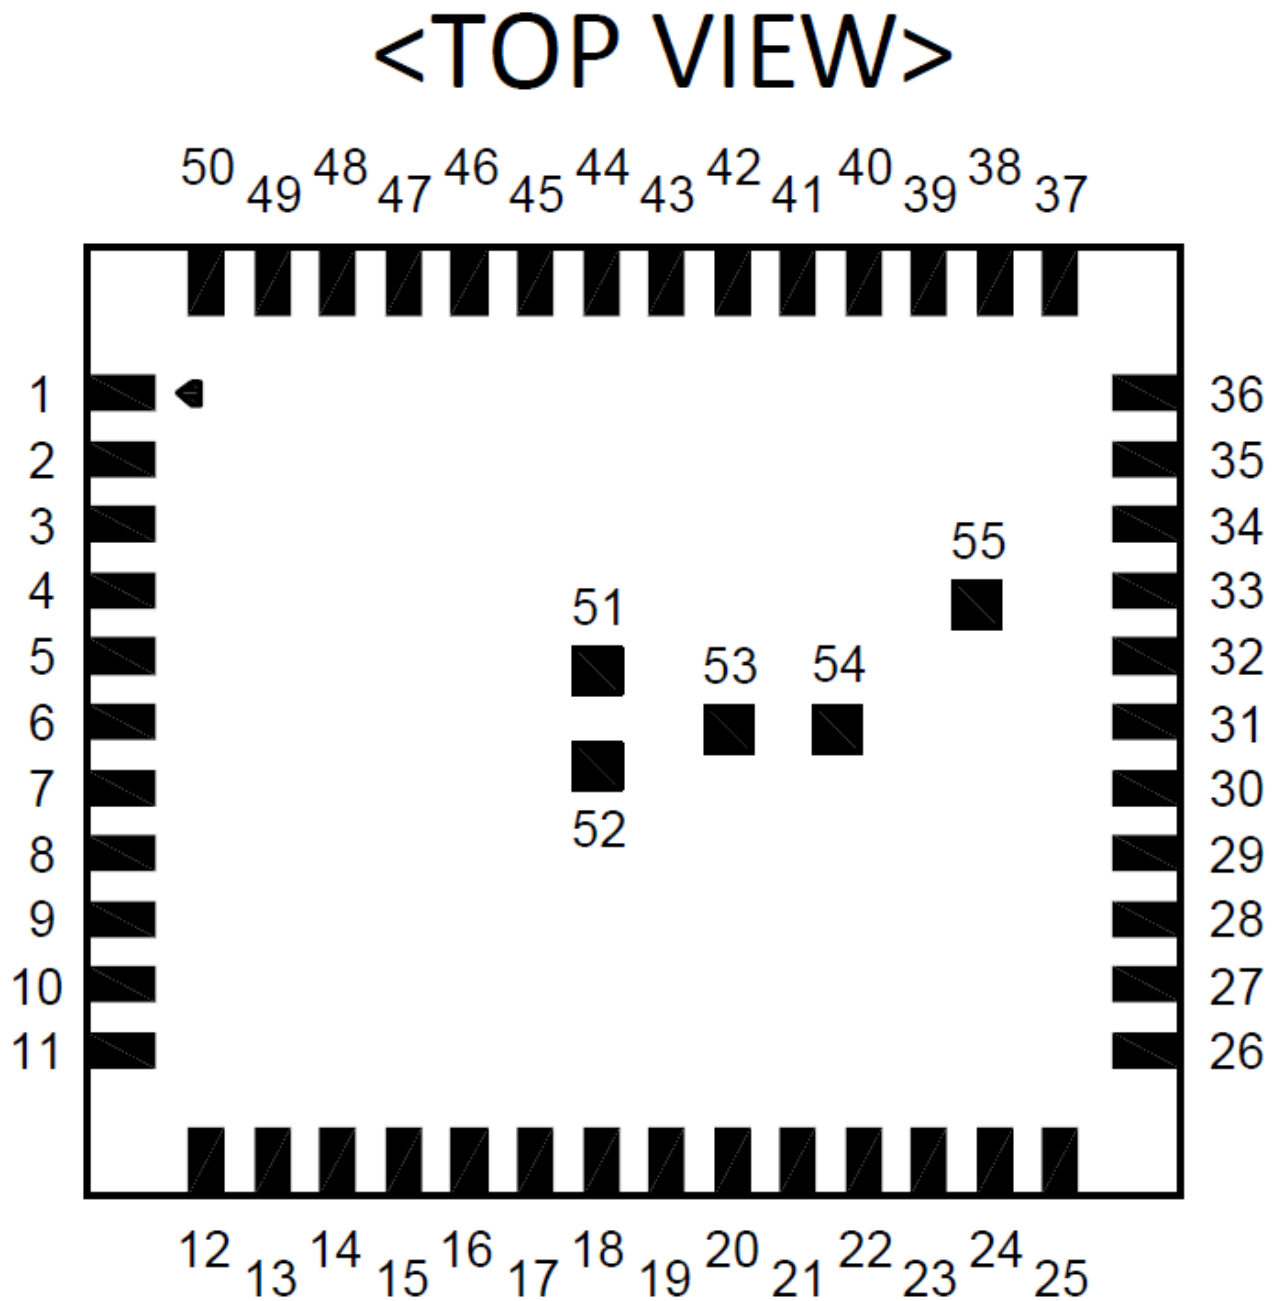


5.2 Pin Assignment

NO	Name	Type	Description
1	GND	—	Ground connections
2	WL_ANT0	I/O	RF I/O port0
3	GND	—	Ground connections
4	GND	—	Ground connections
5	GND	—	Ground connections
6	GND	—	Ground connections
7	GND	—	Ground connections
8	GND	—	Ground connections
9	WL_ANT1	I/O	RF I/O port1
10	GND	—	Ground connections
11	GND	—	Ground connections
12	WL_DEV_WAKE/WL_GPIO_1	I/O	HOST to wake-up WLAN and WL_GPIO_1
13	XTAL_IN	I	External Crystal in/ Single clock source in
14	XTAL_OUT	O	External Crystal out
15	WL_REG_ON	I	Low asserting reset for Wi-Fi core
16	WL_HOST_WAKE/WL_GPIO_0	O	WLAN to wake-up HOST and WL_GPIO_0
17	SDIO_DATA_CMD	I/O	SDIO command line
18	SDIO_DATA_CLK	I/O	SDIO clock line
19	SDIO_DATA_3	I/O	SDIO data line 3
20	SDIO_DATA_2	I/O	SDIO data line 2
21	SDIO_DATA_0	I/O	SDIO data line 0
22	SDIO_DATA_1	I/O	SDIO data line 1
23	GND	—	Ground connections
24	WL_GPIO_8	I/O	WL_GPIO_8
25	CBUCK_OP9	I	Internal Buck voltage generation pin
26	CSR_VLX	O	Internal Buck voltage generation pin
27	GND	—	Ground connections
28	ASR_VLX	O	Internal Analog Buck voltage generation pin
29	ABUCK_1P12	I	Internal Analog Buck voltage generation pin
30	GND	—	Ground connections
31	LPO	I	External Low Power Clock input (32.768KHz)
32	GND	—	Ground connections
33	WL_GPIO_10	I/O	WL_GPIO_10
34	VDDIO	P	I/O Voltage supply input

35	WL_GPIO_11	I/O	WL_GPIO_11
36	VBAT	P	Main power voltage source input
37	WL_GPIO_9	I/O	WL_GPIO_9
38	BT_REG_ON	I	Low asserting reset for Bluetooth core
39	GND	—	Ground connections
40	BT_UART_TXD	O	Bluetooth UART interface
41	BT_UART_RXD	I	Bluetooth UART interface
42	BT_UART_RTS_N	O	Bluetooth UART interface
43	BT_UART_CTS_N	I	Bluetooth UART interface
44	BT_PCM_CLK	I/O	BT PCM CLK; can be master (output) or slave (input)
45	BT_PCM_SYNC	I/O	BT PCM sync ; can be master (output) or slave (input)
46	BT_PCM_IN	I	BT PCM data input
47	BT_PCM_OUT	O	BT PCM data output
48	NC	—	Keep floating(Do not connect to GND)
49	BT_WAKE	I	HOST wake-up Bluetooth device
50	BT_HOST_WAKE	O	Bluetooth device to wake-up HOST
51	GND	—	Ground connections
52	GND	—	Ground connections
53	GND	—	Ground connections
54	GND	—	Ground connections
55	GND	—	Ground connections


6. Dimensions

6.1 Module Dimensions

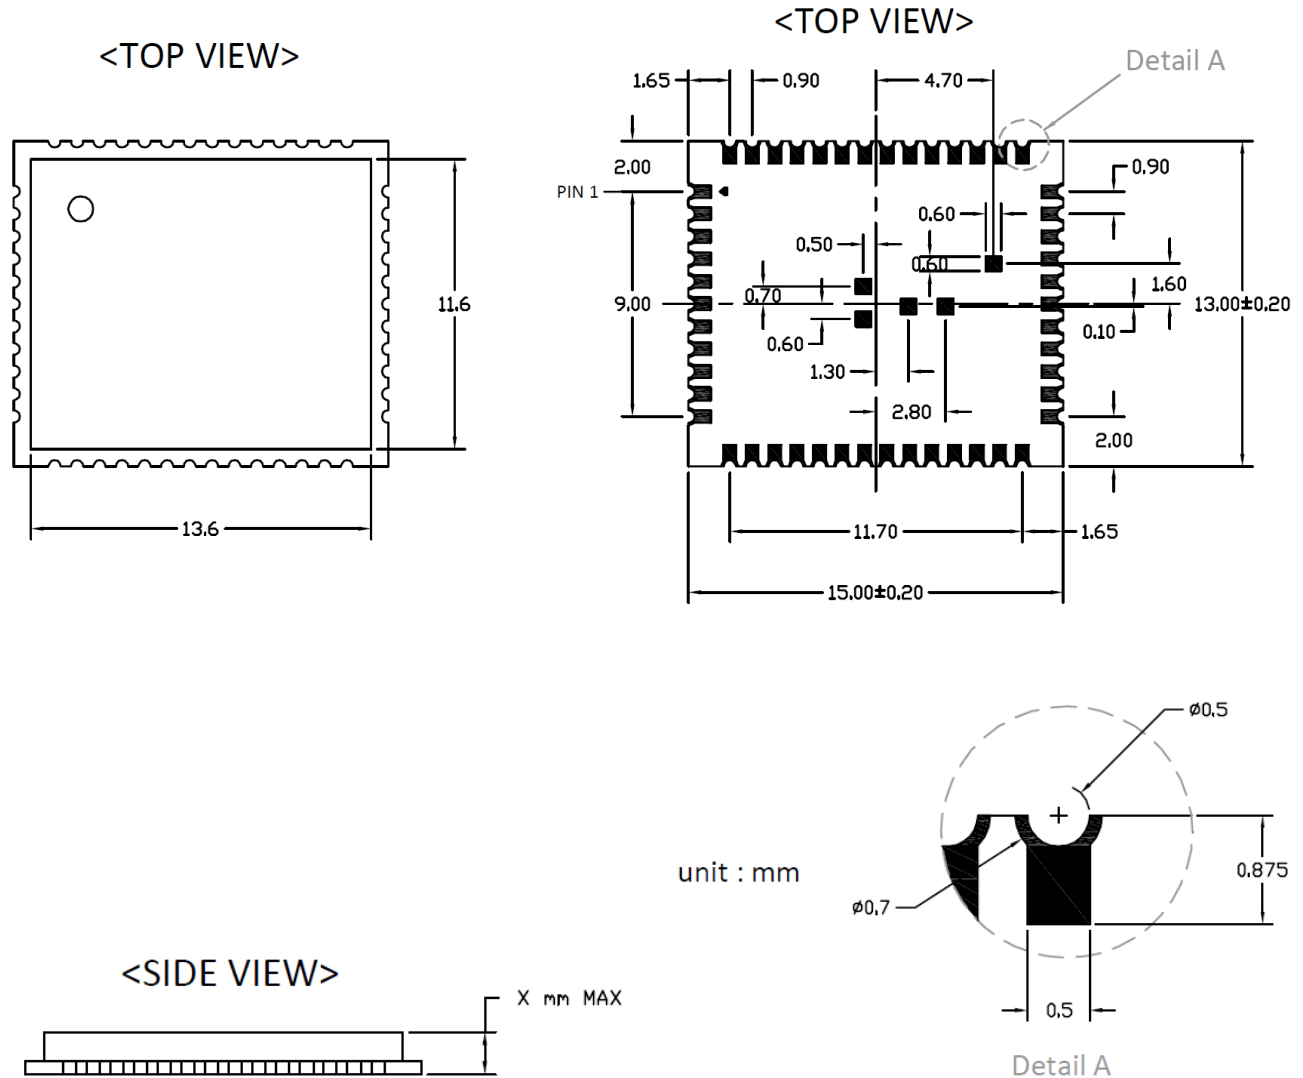


Note, X = 1.85mm

6.2 Recommended footprint

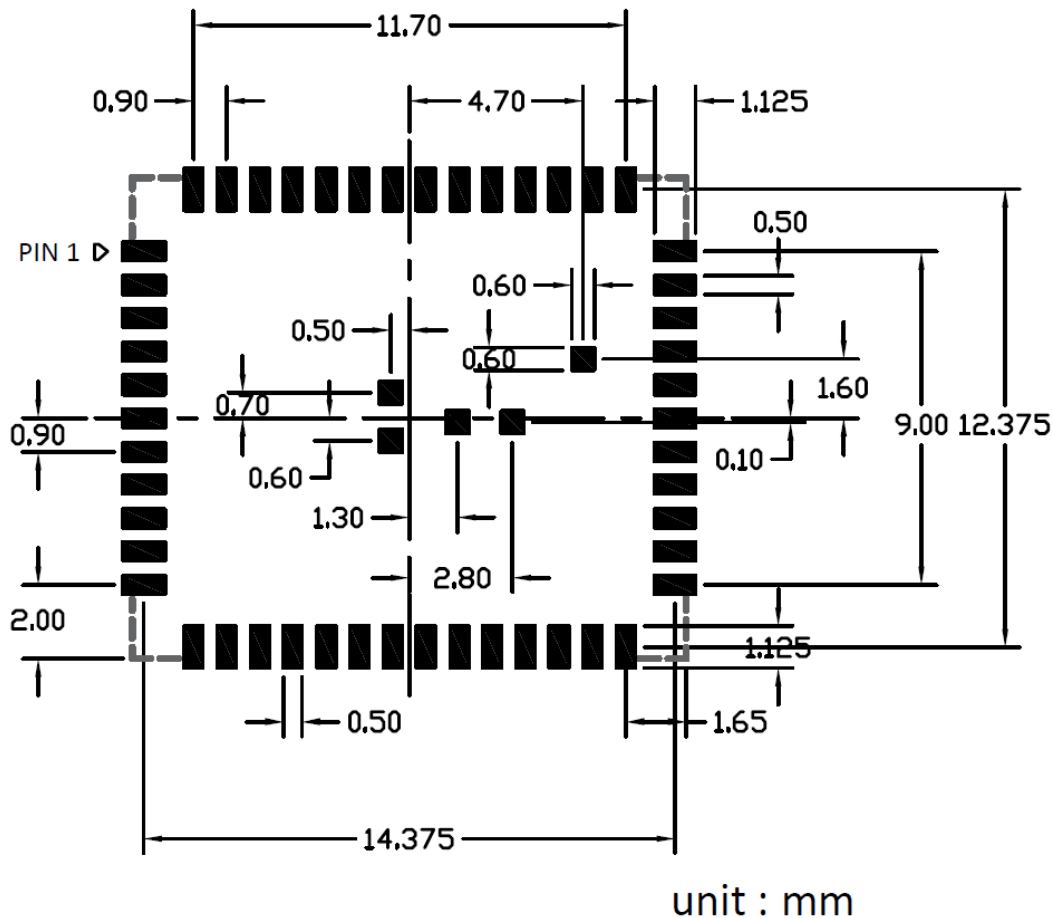

- Solder paste layer design is generally the same as recommended footprint.
(錫膏層設計通常建議和焊墊尺寸相同)
- If soldering quality with good wetting on upright side is essential for PQC, how to optimize the aperture design in the stencil to adjust the amount of solder paste would be crucial.
In addition, a kind of stencil design with stepped thickness in partial area would be considered if the thickness of stencil is about 0.1mm or thinner. Please optimize the stencil design by manufacture engineer or contact AMPAK FAE for assistance.
(如果模組吃錫品質考量側面爬錫，如何優化鋼網開孔設計以調整適當的錫膏量是非常重要的。尤其鋼網的厚度大約是 0.1mm 或更薄時，可考慮局部加厚鋼網的設計。請諮詢製程工程師以優化鋼網的設計，或是聯絡正基科技技術支持團隊)。

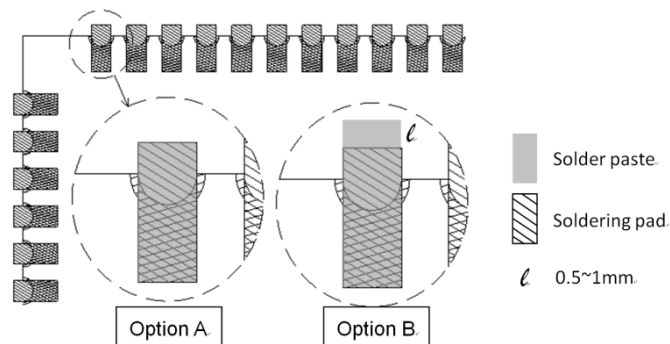

7. External clock reference

External LPO signal characteristics

Parameter	Specification	Units
Nominal input frequency	32.768	kHz
Frequency accuracy	+/-25	ppm
Duty cycle	30 - 70	%
Input signal amplitude	1.8±0.09	V
Signal type	Square-wave or sine-wave	-
Input impedance	>100k <5	Ω pF
Clock jitter (integrated over 300Hz – 15KHz)	<1	Hz
Output high voltage	0.7V _{io} - V _{io}	V

External 37.4MHz X'TAL characteristics

Parameter	Specification	Units
Nominal frequency - F ₀	37.4	MHz
Frequency Tolerance - $\Delta F / F_0$ (At 25°C +/- 3°C)	+/- 10	ppm
Operation Temperature Range - Topr	-30 ~ + 85	°C
Freq. Stability(over operating temperature) - TC Ref. to 25°C	+/- 10	ppm
Load capacitance - CL	18	pF
Equivalent Series Resistance – ESR	Max. 60	Ω
Drive Level - DL	Typ. 50, Max. 100	uW
Insulation resistance – IR At 100Vdc	Min. 500	M Ω


8. Host Interface Timing Diagram

8.1 Power-up Sequence Timing Diagram


The module has signals that allow the host to control power consumption by enabling or disabling the Bluetooth, WLAN and internal regulator blocks. These signals are described below.

Additionally, diagrams are provided to indicate proper sequencing of the signals for various operating states. The timing value indicated are minimum required values: longer delays are also acceptable.


- **WL_REG_ON**: Used by the PMU to power up or power down the internal regulators used by the WLAN section. When this pin is high, the regulators are enabled and the WLAN section is out of reset. When this pin is low the WLAN section is in reset.
- **BT_REG_ON**: Used by the PMU to power up or power down the internal regulators used by the BT section. Low asserting reset for Bluetooth. This pin has no effect on WLAN and does not control any PMU functions. This pin must be driven high or low (not left floating).

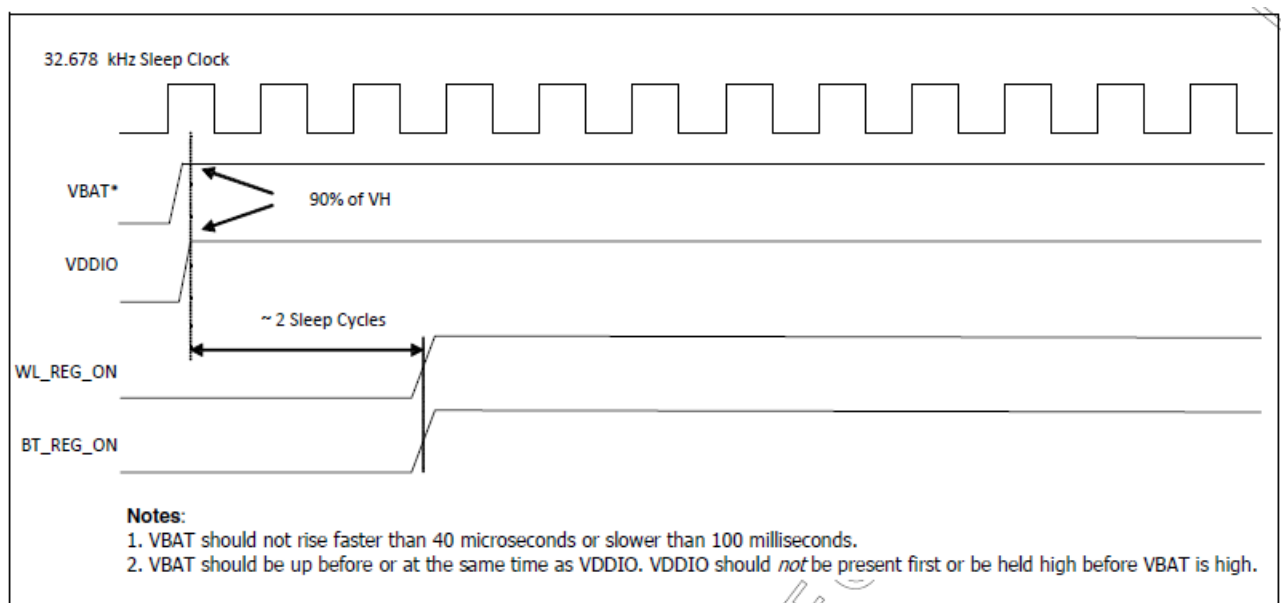


WLAN=ON, Bluetooth=ON

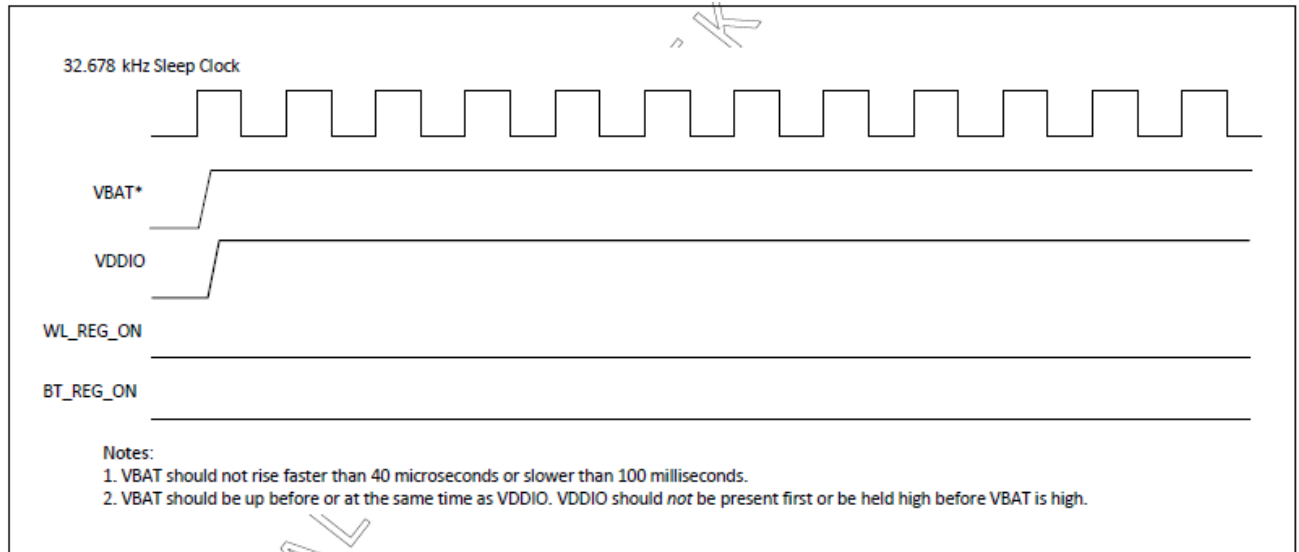

WLAN=OFF, Bluetooth=OFF

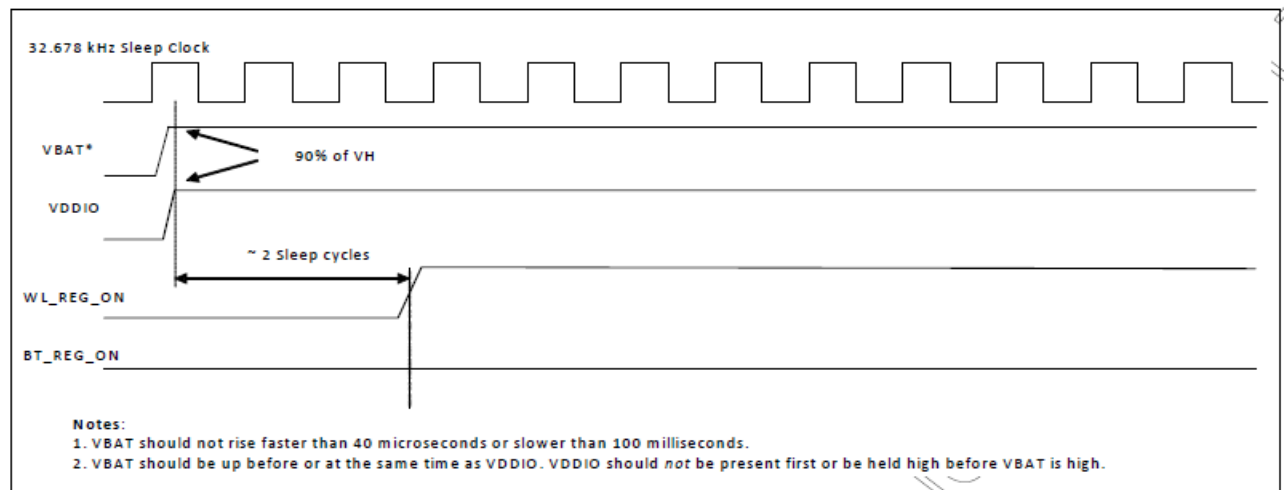

WLAN=ON, Bluetooth=OFF

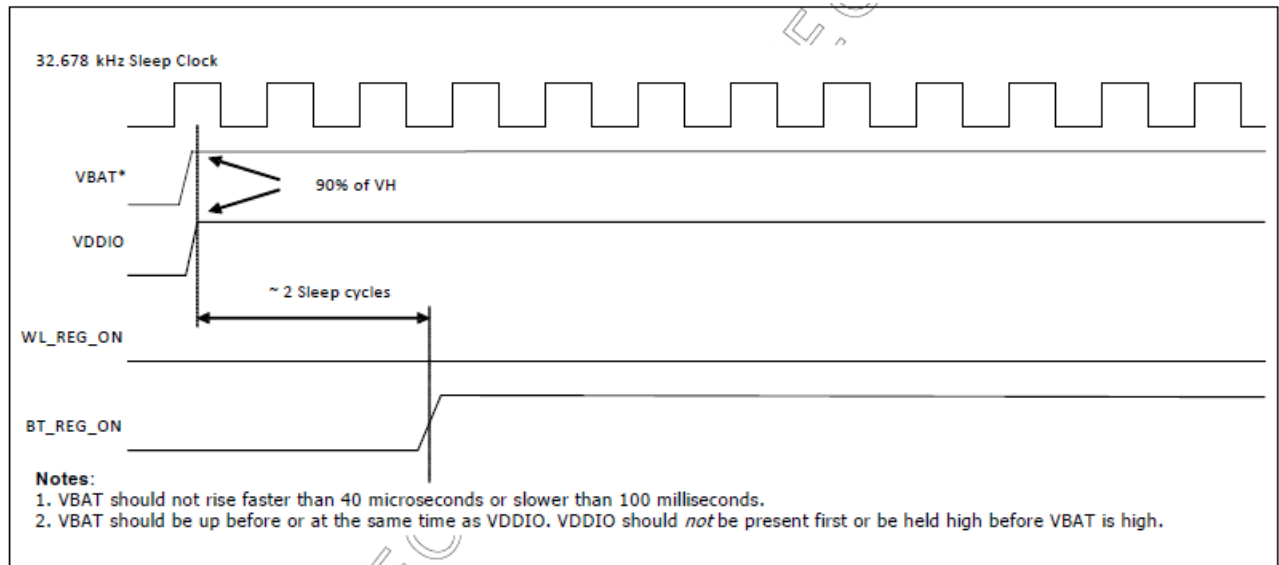

WLAN=OFF, Bluetooth=ON

8.2 SDIO Interface Description

The module WLAN section provides support for SDIO version 3.0 at 1.8V signaling, including the new UHS-1 mode:

DS : Default speed (DS) up to 25MHz, including 1- and 4-bit modes.


- SDR12 : SDR up to 25 MHz
- SDR25 : SDR up to 50MHz
- SDR50 : SDR up to 100MHz
- SDR104 : SDR up to 208MHz
- DDR50 : DDR up to 50MHz

Noted : The AP6276S is backward compatible with SDIO V2.0 host interfaces.

SDIO Pin Description

SD 4-Bit Mode		SD 1-Bit Mode	
DATA0	Data Line 0	DATA	Data line
DATA1	Data Line 1 or Interrupt	IRQ	Interrupt
DATA2	Data Line 2 or Read Wait	RW	Read Wait
DATA3	Data Line 3	N/C	Not used
CLK	Clock	CLK	Clock
CMD	Command Line	CMD	Command Line

SDIO Default Mode Timing Diagram

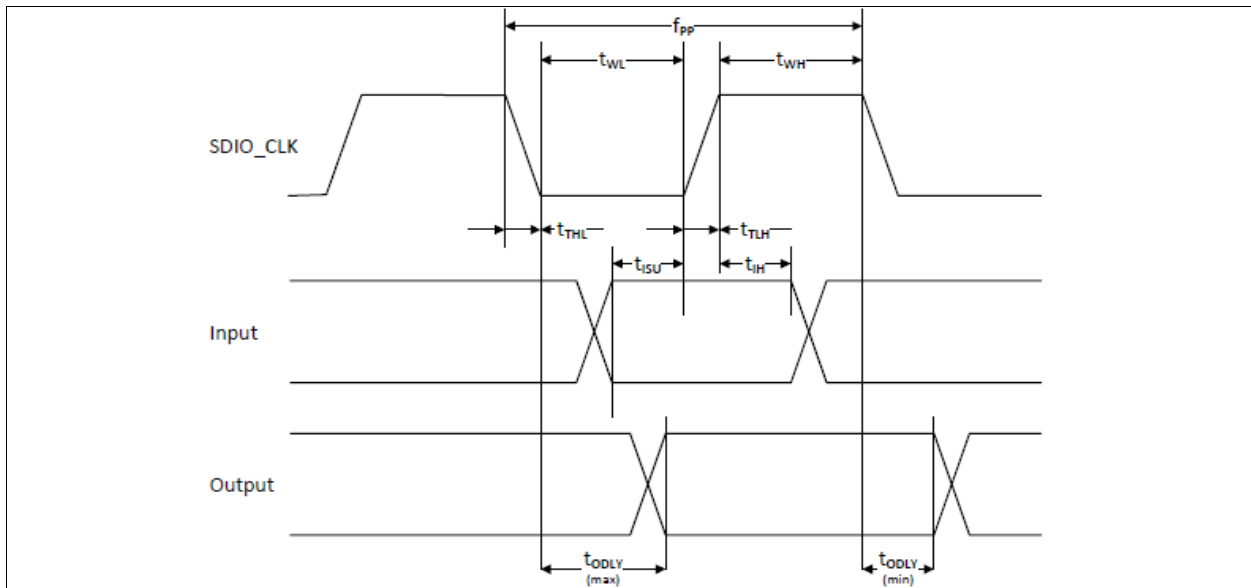


Parameter	Symbol	Minimum	Typical	Maximum	Unit
SDIO CLK (All values are referred to minimum V_{IH} and maximum V_{IL}^b)					
Frequency – Data Transfer mode	f_{PP}	0	–	25	MHz
Frequency – Identification mode	f_{OD}	0	–	400	kHz
Clock low time	t_{WL}	10	–	–	ns
Clock high time	t_{WH}	10	–	–	ns
Clock rise time	t_{TLH}	–	–	10	ns
Clock low time	t_{THL}	–	–	10	ns
Inputs: CMD, DAT (referenced to CLK)					
Input setup time	t_{ISU}	5	–	–	ns
Input hold time	t_{IH}	5	–	–	ns
Outputs: CMD, DAT (referenced to CLK)					
Output delay time – Data Transfer mode	t_{ODLY}	0	–	14	ns
Output delay time – Identification mode	t_{ODLY}	0	–	50	ns

- a. Timing is based on $CL \leq 40pF$ load on CMD and Data.
 b. $\min(V_{IH}) = 0.7 \times V_{DDIO}$ and $\max(V_{IL}) = 0.2 \times V_{DDIO}$.


SDIO Bus Timing Specifications in SDR Modes

Clock timing (SDR Modes)

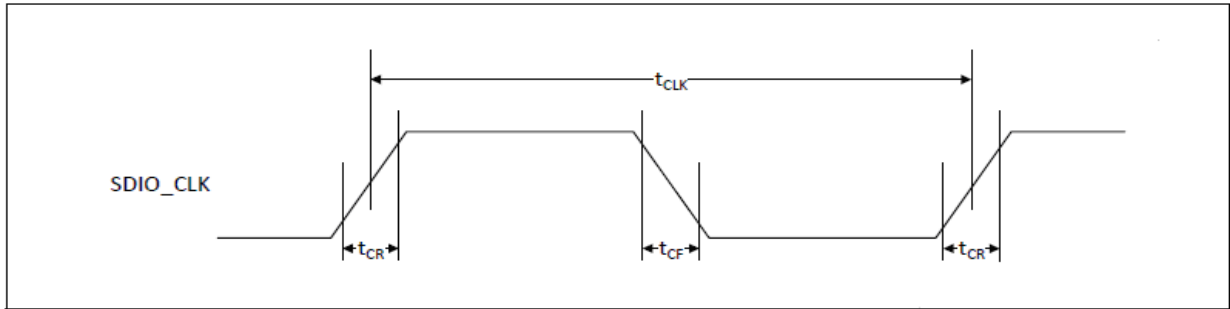


Parameter	Symbol	Minimum	Maximum	Unit	Comments
—	t_{CLK}	40	—	ns	SDR12 mode
		20	—	ns	SDR25 mode
		10	—	ns	SDR50 mode
		4.8	—	ns	SDR104 mode
—	t_{CR}, t_{CF}	—	$0.2 \times t_{CLK}$	ns	$t_{CR}, t_{CF} < 2.00$ ns (max) @100 MHz, $C_{CARD} = 10$ pF $t_{CR}, t_{CF} < 0.96$ ns (max) @208 MHz, $C_{CARD} = 10$ pF
Clock duty	—	30	70	%	—

SDIO Bus Input timing (SDR Modes)

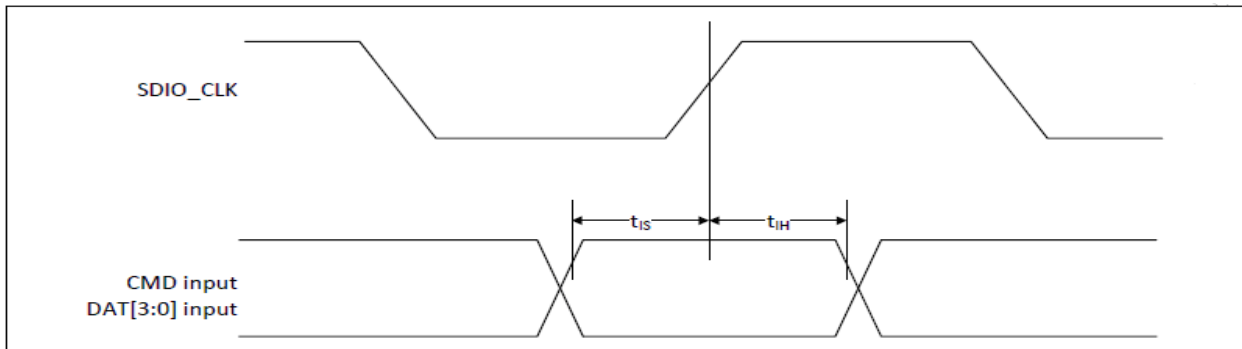


Symbol	Minimum	Maximum	Unit	Comments
SDR104 Mode				
t_{IS}	1.4	—	ns	$C_{CARD} = 10$ pF, VCT = 0.975V
t_{IH}	0.80	—	ns	$C_{CARD} = 5$ pF, VCT = 0.975V
SDR50 Mode				
t_{IS}	3.00	—	ns	$C_{CARD} = 10$ pF, VCT = 0.975V
t_{IH}	0.80	—	ns	$C_{CARD} = 5$ pF, VCT = 0.975V

SDIO Bus output timing (SDR Modes up to 100MHz)

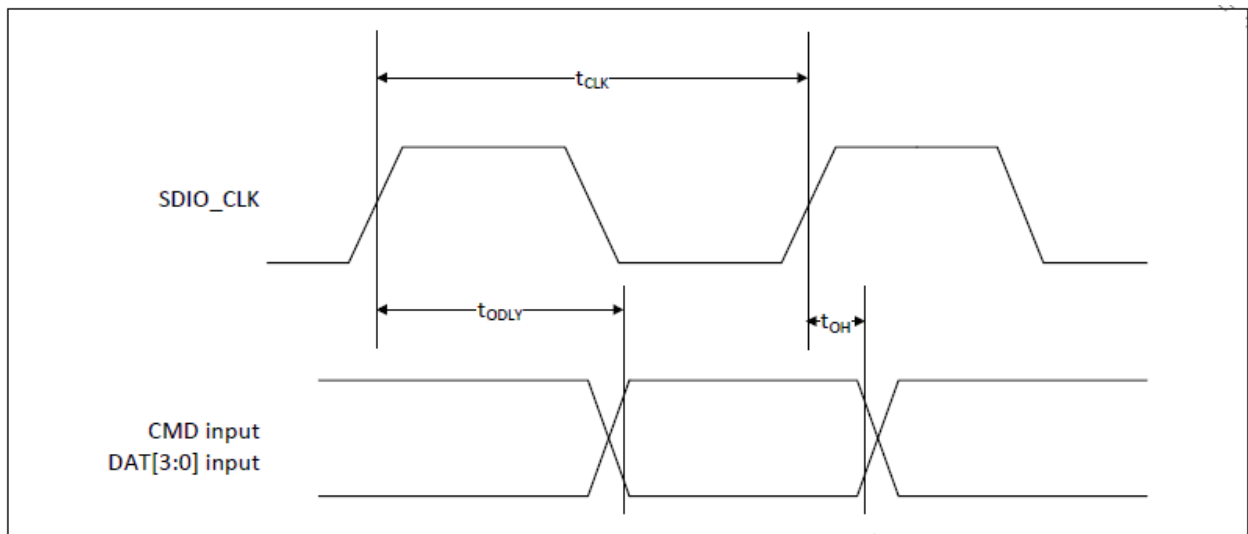

Symbol	Minimum	Maximum	Unit	Comments
t_{ODLY}	–	7.5	ns	$t_{CLK} \geq 10$ ns $C_L = 30$ pF using driver type B for SDR50
t_{ODLY}	–	14.0	ns	$t_{CLK} \geq 20$ ns $C_L = 40$ pF using for SDR12, SDR25
t_{OH}	1.5	–	ns	Hold time at the t_{ODLY} (min) $C_L = 15$ pF


Card output timing (SDR Modes 100MHz to 208MHz)

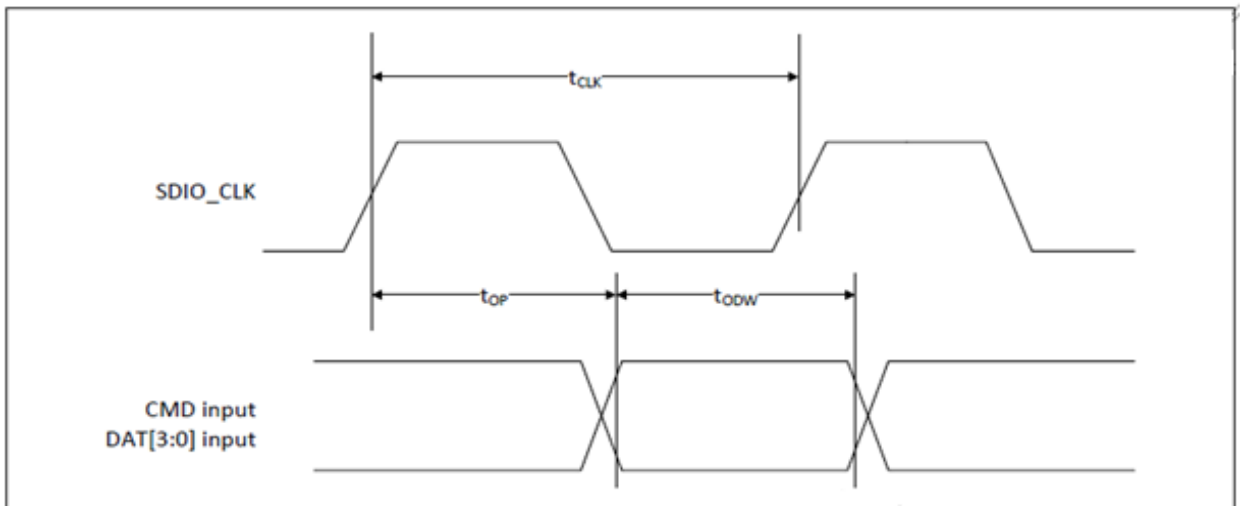


Symbol	Minimum	Maximum	Unit	Comments
t_{OP}	0	2	UI	Card output phase
Δt_{OP}	-350	+1550	ps	Delay variation due to temp change after tuning
t_{ODW}	0.60	—	UI	$t_{ODW}=2.88$ ns @ 208 MHz

- $\Delta t_{OP} = +1550$ ps for junction temperature of $\Delta t_{OP} = 90$ degrees during operation
- $\Delta t_{OP} = -350$ ps for junction temperature of $\Delta t_{OP} = -20$ degrees during operation
- $\Delta t_{OP} = +2600$ ps for junction temperature of $\Delta t_{OP} = -20$ to $+125$ degrees during operation

Δt_{OP} Consideration for Variable Data Window (SDR 104 Mode)

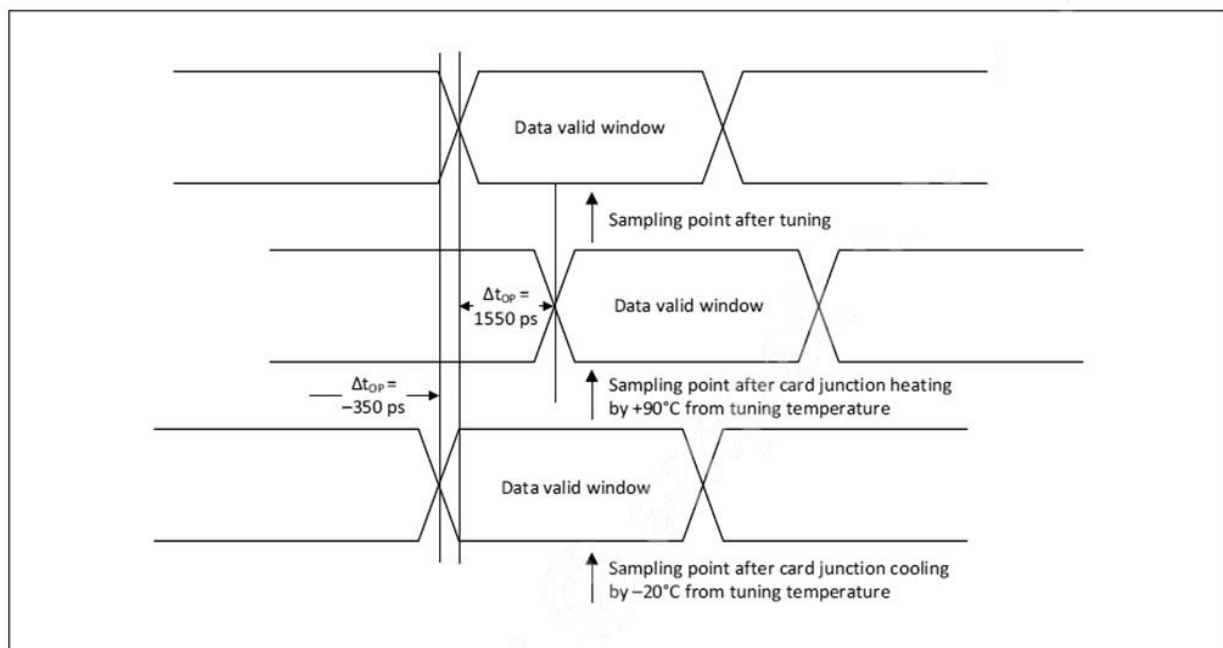


SDIO Bus Timing Specifications in DDR50 Mode

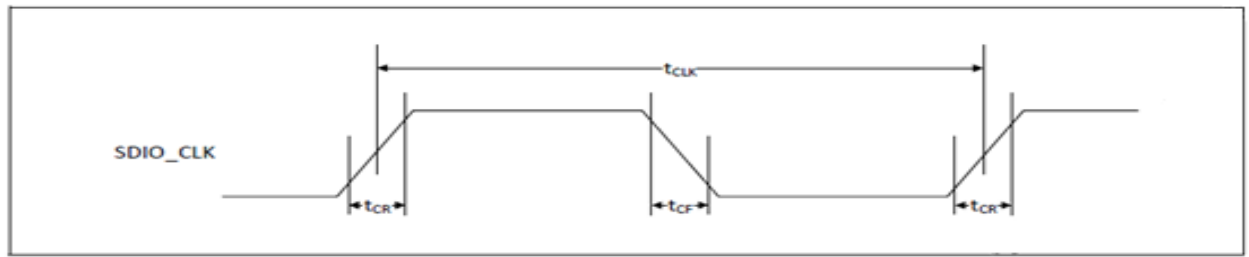

Parameter	Symbol	Minimum	Maximum	Unit	Comments
—	t_{CLK}	20	—	ns	DDR50 mode
—	t_{CR}, t_{CF}	—	$0.2 \times t_{CLK}$	ns	$t_{CR}, t_{CF} < 4.00$ ns (max) @50 MHz, $C_{CARD} = 10$ pF
Clock duty	—	45	55	%	—

Data Timing

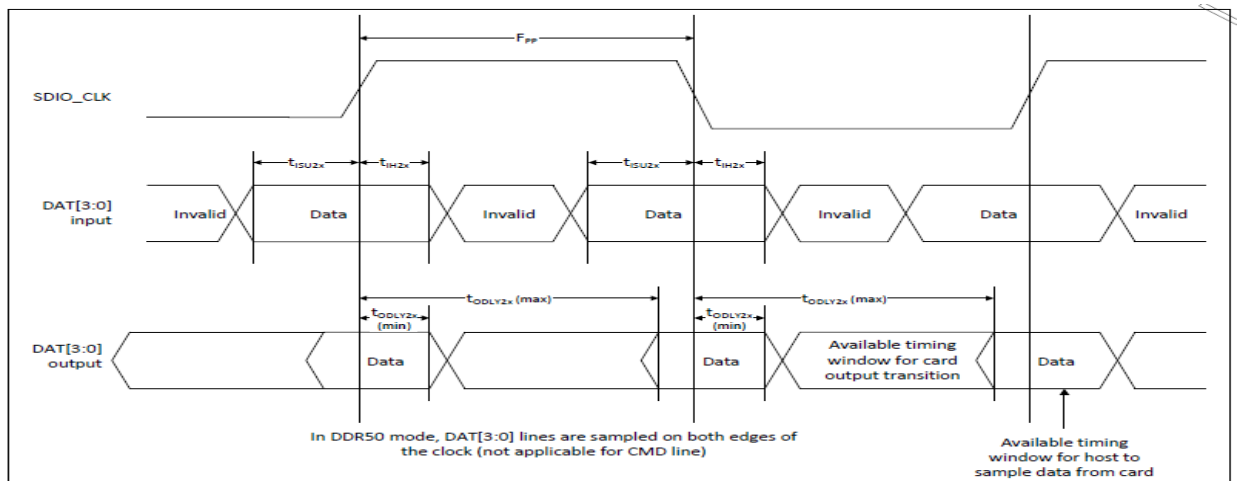


Parameter	Symbol	Minimum	Maximum	Unit	Comments
Input CMD					
Input setup time	t_{ISU}	6	—	ns	$C_{CARD} < 10$ pF (1 Card)
Input hold time	t_{IH}	0.8	—	ns	$C_{CARD} < 10$ pF (1 Card)
Output CMD					
Output delay time	t_{ODLY}	—	13.7	ns	$C_{CARD} < 30$ pF (1 Card)
Output hold time	t_{OH}	1.5	—	ns	$C_{CARD} < 15$ pF (1 Card)
Input DAT					
Input setup time	t_{ISU2x}	3	—	ns	$C_{CARD} < 10$ pF (1 Card)
Input hold time	t_{IH2x}	0.8	—	ns	$C_{CARD} < 10$ pF (1 Card)
Output DAT					
Output delay time	t_{ODLY2x}	—	7.5	ns	$C_{CARD} < 25$ pF (1 Card)
Output hold time	t_{ODLY2x}	1.5	—	ns	$C_{CARD} < 15$ pF (1 Card)

8.3 PCM Interface Description

The PCM Interface on the AP6276S can connect to linear PCM Codec devices in master or slave mode. In master mode, the AP6276S generates the PCM_CLK and PCM_SYNC signals, and in slave mode, these signals are provided by another master on the PCM interface and are inputs to the AP6276S. The configuration of the PCM interface may be adjusted by the host through the use of vendor-specific HCI commands.

Short Frame Sync, Master Modem

PCM Timing Diagram (Short Frame Sync, Master Mode)

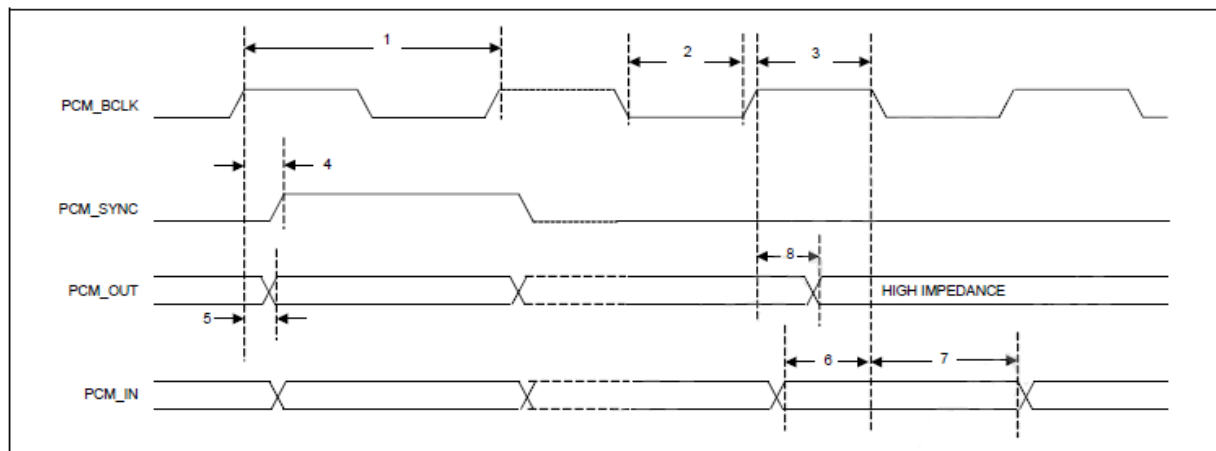


PCM Interface Timing Specifications (Short Frame Sync, Master Mode)

Reference	Characteristics	Minimum	Typical	Maximum	Unit
1	PCM bit clock frequency		–	12	MHz
2	PCM bit clock low	41	–	–	ns
3	PCM bit clock high	41	–	–	ns
4	PCM_SYNC delay	0	–	25	ns
5	PCM_OUT delay	0	–	25	ns
6	PCM_IN setup	8	–	–	ns
7	PCM_IN hold	8	–	–	ns
8	Delay from rising edge of PCM_BCLK during last bit period to PCM_OUT becoming high impedance	0	–	25	ns

Short Frame Sync, Slave Mode

PCM Timing Diagram (Short Frame Sync, Slave Mode)

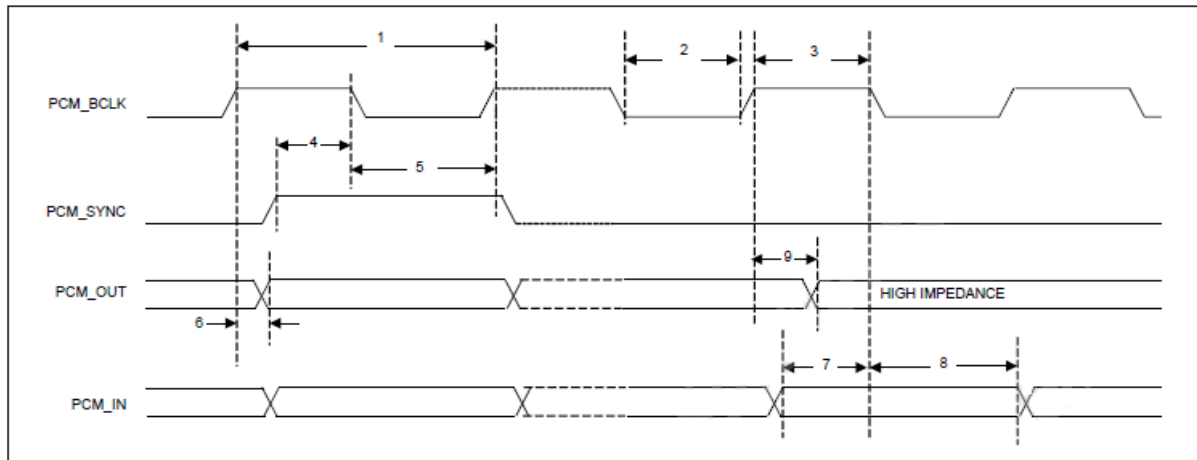


PCM Interface Timing Specifications (Short Frame Sync, Slave Mode)

Reference	Characteristics	Minimum	Typical	Maximum	Unit
1	PCM bit clock frequency	–	–	12	MHz
2	PCM bit clock low	41	–	–	ns
3	PCM bit clock high	41	–	–	ns
4	PCM_SYNC setup	8	–	–	ns
5	PCM_SYNC hold	8	–	–	ns
6	PCM_OUT delay	0	–	25	ns
7	PCM_IN setup	8	–	–	ns
8	PCM_IN hold	8	–	–	ns
9	Delay from rising edge of PCM_BCLK during last bit period to PCM_OUT becoming high impedance	0	–	25	ns

Long Frame Sync, Master Mode

PCM Timing Diagram (Long Frame Sync, Master Mode)

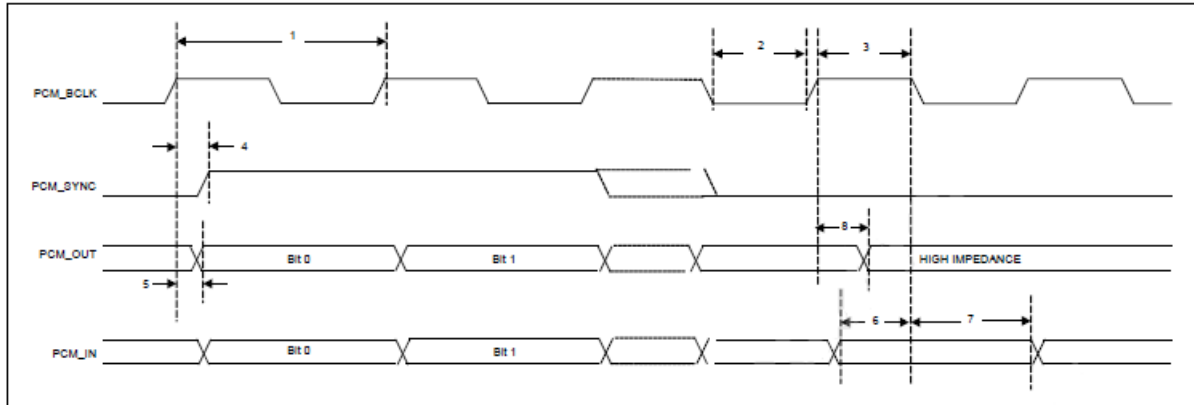


PCM Interface Timing Specifications (Long Frame Sync, Master Mode)

Reference	Characteristics	Minimum	Typical	Maximum	Unit
1	PCM bit clock frequency	–	–	12	MHz
2	PCM bit clock low	41	–	–	ns
3	PCM bit clock high	41	–	–	ns
4	PCM_SYNC delay	0	–	25	ns
5	PCM_OUT delay	0	–	25	ns
6	PCM_IN setup	8	–	–	ns
7	PCM_IN hold	8	–	–	ns
8	Delay from rising edge of PCM_BCLK during last bit period to PCM_OUT becoming high impedance	0	–	25	ns

Long Frame Sync, Slave Mode

PCM Timing Diagram (Long Frame Sync, Slave Mode)

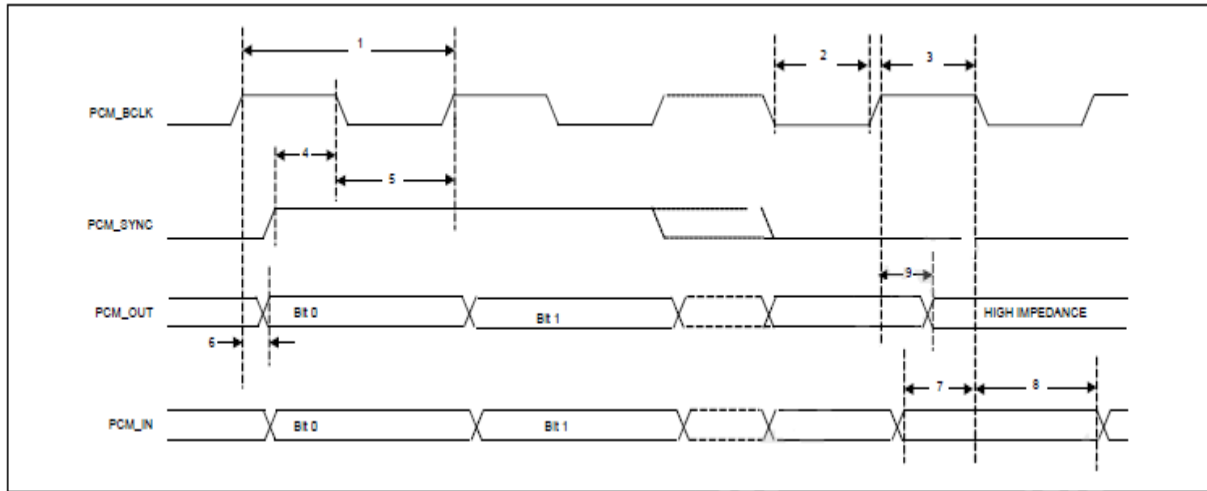


PCM Interface Timing Specifications (Long Frame Sync, Slave Mode)

Reference	Characteristics	Minimum	Typical	Maximum	Unit
1	PCM bit clock frequency	–	–	12	MHz
2	PCM bit clock low	41	–	–	ns
3	PCM bit clock high	41	–	–	ns
4	PCM_SYNC setup	8	–	–	ns
5	PCM_SYNC hold	8	–	–	ns
6	PCM_OUT delay	0	–	25	ns
7	PCM_IN setup	8	–	–	ns
8	PCM_IN hold	8	–	–	ns
9	Delay from rising edge of PCM_BCLK during last bit period to PCM_OUT becoming high impedance	0	–	25	ns

Short Frame Sync, Burst Mode

PCM Burst Mode Timing (Receive Only, Short Frame Sync)

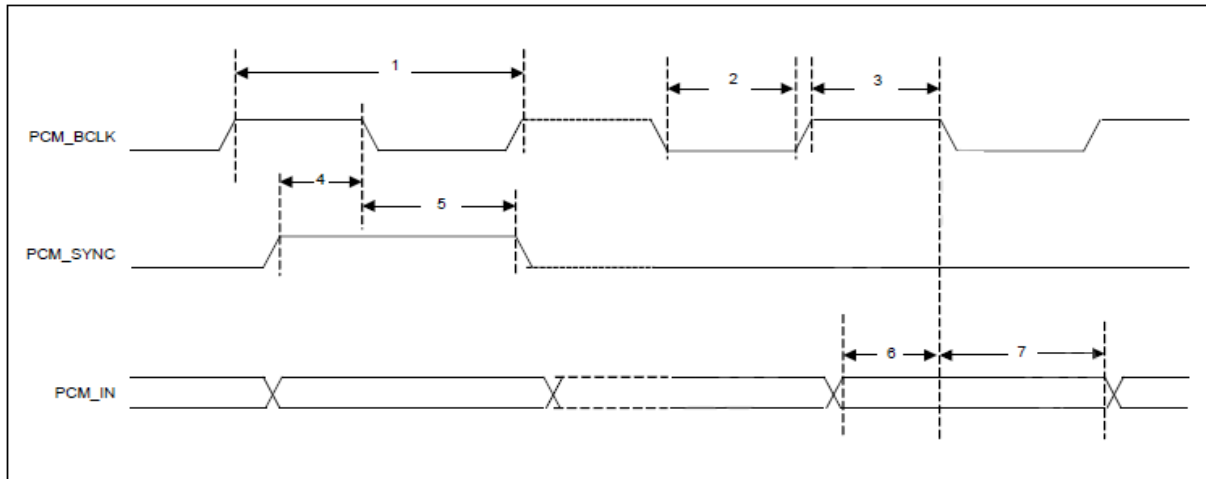


PCM Burst Mode (Receive Only, Short Frame Sync)

Reference	Characteristics	Minimum	Typical	Maximum	Unit
1	PCM bit clock frequency	–	–	24	MHz
2	PCM bit clock low	20.8	–	–	ns
3	PCM bit clock high	20.8	–	–	ns
4	PCM_SYNC setup	8	–	–	ns
5	PCM_SYNC hold	8	–	–	ns
6	PCM_IN setup	8	–	–	ns
7	PCM_IN hold	8	–	–	ns

Long Frame Sync, Burst Mode

PCM Burst Mode Timing (Receive Only, Long Frame Sync)

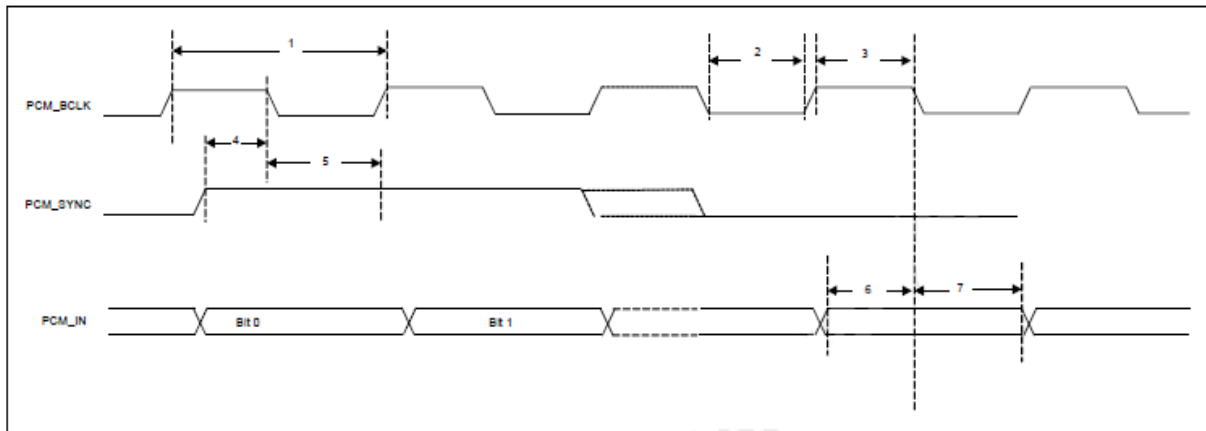

PCM Burst Mode (Receive Only, Long Frame Sync)

Reference	Characteristics	Minimum	Typical	Maximum	Unit
1	PCM bit clock frequency	–	–	24	MHz
2	PCM bit clock low	20.8	–	–	ns
3	PCM bit clock high	20.8	–	–	ns
4	PCM_SYNC setup	8	–	–	ns
5	PCM_SYNC hold	8	–	–	ns
6	PCM_IN setup	8	–	–	ns
7	PCM_IN hold	8	–	–	ns

8.4 UART Interface Description

The UART is a standard 4-wire interface (RX, TX, RTS, and CTS) with adjustable baud rates from 9600 bps to 4.0 Mbps. The interface features an automatic baud rate detection capability that returns a baud rate selection. Alternatively, the baud rate may be selected through a vendor-specific UART HCI command.

UART has a 1040-byte receive FIFO and a 1040-byte transmit FIFO to support EDR. Access to the FIFOs is conducted through the AHB interface through either DMA or the CPU. The UART supports the Bluetooth 5.0 UART HCI specification: H4, a custom Extended H4, and H5. The default baud rate is 115.2 Kbaud.

The UART supports the 3-wire H5 UART transport, as described in the Bluetooth specification (Three-wire UART Transport Layer). Compared to H4, the H5 UART transport reduces the number of signal lines required by eliminating the CTS and RTS signals.


The UART can perform XON/XOFF flow control and includes hardware support for the Serial Line Input Protocol (SLIP). It can also perform wake-on activity. For example, activity on the RX or CTS inputs can wake the chip from a sleep state.

Normally, the UART baud rate is set by a configuration record downloaded after device reset, or by automatic baud rate detection, and the host does not need to adjust the baud rate. Support for changing the baud rate during normal HCI UART operation is included through a vendor-specific command that allows the host to adjust the contents of the baud rate registers. The UARTs operate correctly with the host UART as long as the combined baud rate error of the two devices is within $\pm 2\%$.

Example of Common Baud Rates

Desired Rate	Actual Rate	Error (%)
4000000	4000000	0.00
3692000	3692308	0.01
3000000	3000000	0.00
2000000	2000000	0.00
1500000	1500000	0.00
1444444	1454544	0.70
921600	923077	0.16
460800	461538	0.16
230400	230796	0.17
115200	115385	0.16
57600	57692	0.16
38400	38400	0.00
28800	28846	0.16
19200	19200	0.00
14400	14423	0.16
9600	9600	0.00


UART Timing

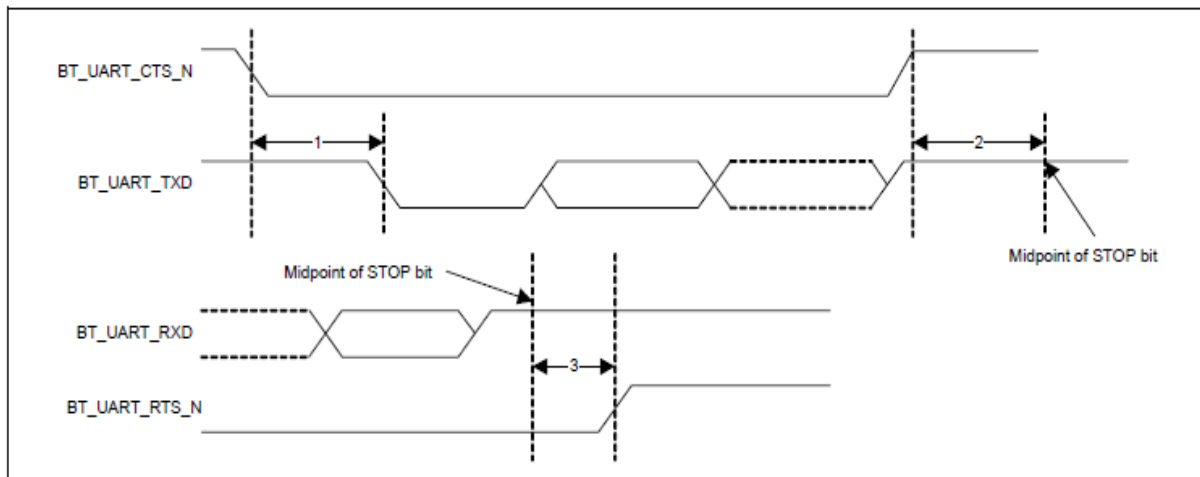

UART Timing Specifications

Ref	Characteristics	Min.	Typ.	Max.	Unit
1	Delay time, BT_UART_CTS_N low to BT_UART_TXD valid	–	–	1.5	Bit periods
2	Setup time, BT_UART_CTS_N high before midpoint of stop bit	–	–	0.5	Bit periods
3	Delay time, midpoint of stop bit to BT_UART_RTS_N high	–	–	0.5	Bit periods

9. Recommended Reflow Profile

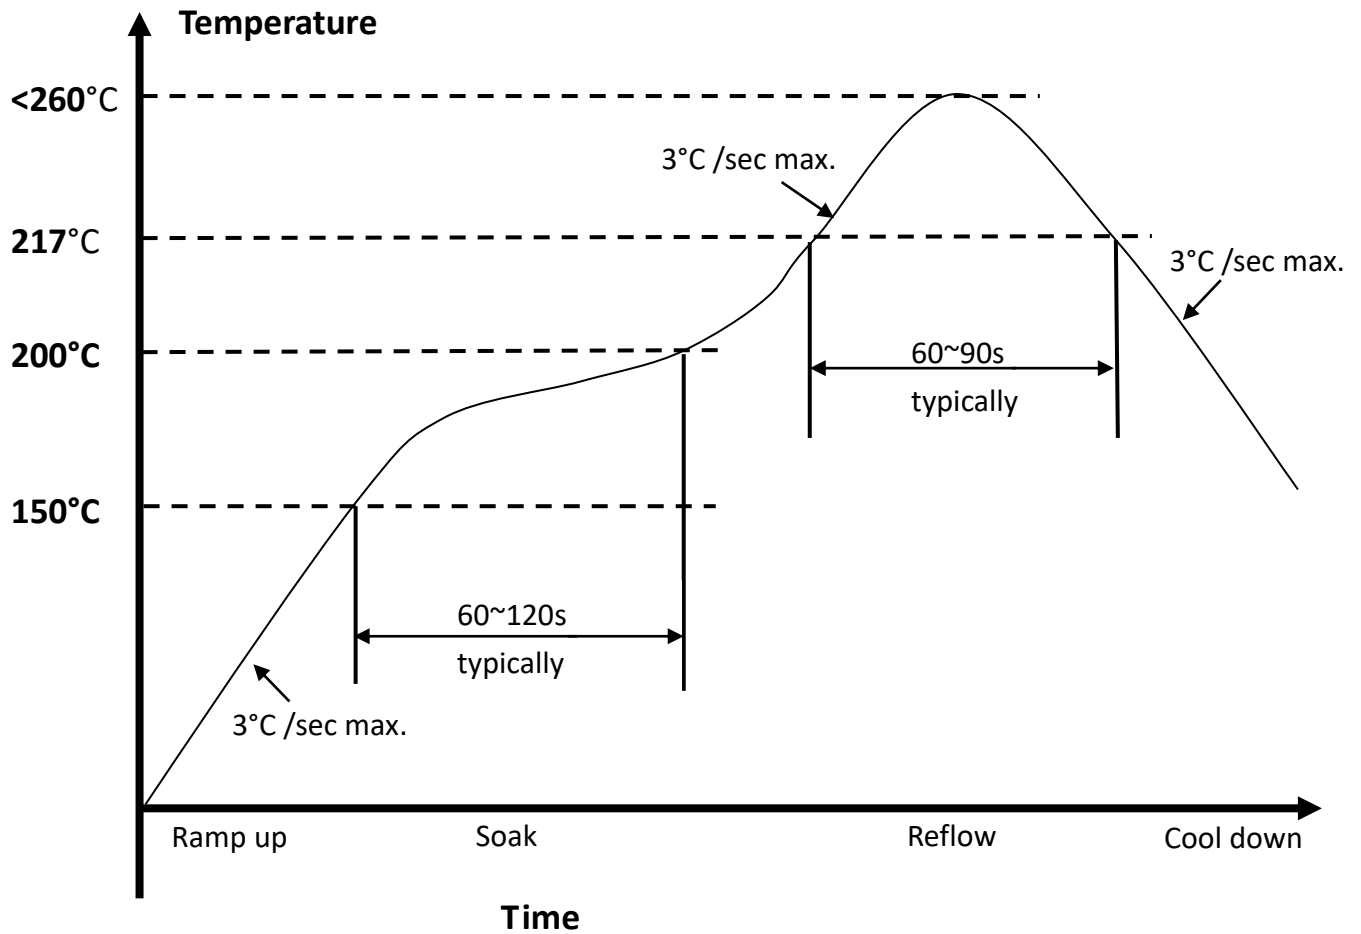


1. Referred to IPC/JEDEC standard
2. Peak Temperature : <260°C (Time within 5°C of actual Peak Temperature 20-40 seconds)
3. Cycle of Reflow : 2 times max.
4. Adding Nitrogen (N₂) to implement 2000ppm or less of oxygen concentration during reflow process is recommended.
5. If the shelf time is exceeded, be sure baking step to remove the moisture from the component

10. Package Information

10.1 Label

Label A → Anti-static and humidity notice

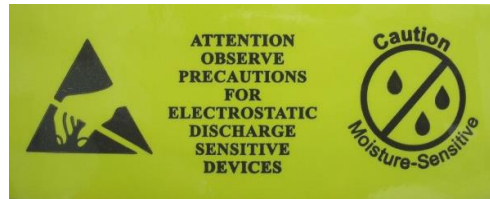

Label B → MSL caution / Storage Condition

	Caution	LEVEL
	This bag contains MOISTURE-SENSITIVE DEVICES	 If blank, see adjacent bar code label
1. Calculated shelf life in sealed bag: 12 months at <40°C and <90% relative humidity (RH) 2. Peak package body temperature: _____ °C If blank, see adjacent bar code label 3. After bag is opened, devices that will be subjected to reflow solder or other high temperature process must be a) Mounted within: _____ hours of factory conditions If blank, see adjacent bar code label ≤30°C/60% RH, or b) Stored per J-STD-033 4. Devices require bake, before mounting, if: a) Humidity Indicator Card reads >10% for level 2a - 5a devices or >60% for level 2 devices when read at 23 ± 5°C b) 3a or 3b are not met 5. If baking is required, refer to IPC/JEDEC J-STD-033 for bake procedure Bag Seal Date: _____ If blank, see adjacent bar code label Note: Level and body temperature defined by IPC/JEDEC J-STD-020		


Label C → Inner box label .

PO:	
AMK DEVICE:	
PKG S/N:	 9PKGYYMDDNNNNN
Model Name:	 APXXXXXXXX (R3HF)
P/N:	 99X-XXX-XXXXR
Quantity:	 QQQQ
Date Code:	 YYWW
Lot Code:	 XXXXXXXX

Label D → Carton box label .

AMPAK Technology Inc.	
PO:	
AMK DEVICE:	
Model Name:	 APXXXXXXXX (R3HF)
Part No.:	 99X-XXX-XXXXR
Quantity:	 QQQQ
Lot D/C:	 XXXXXXXX YYWW QQQQ
Manufacture:	 YYYY/MM/DD


10.2 Dimension



Part Number



Lot Code


Date Code

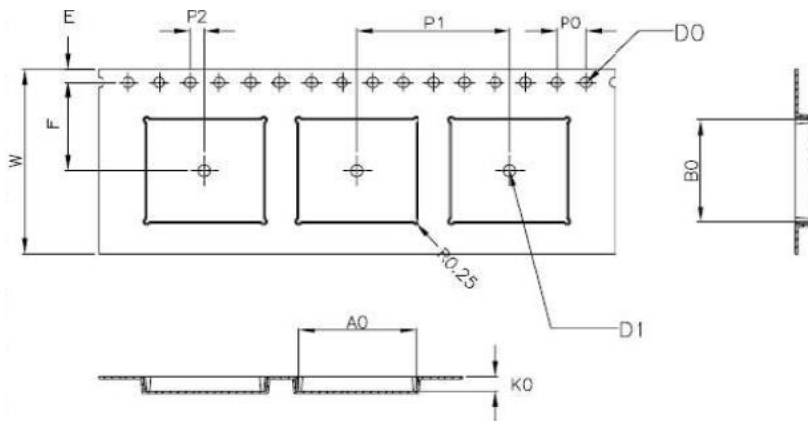

W	24.00±0.30
A0	15.30±0.10
B0	13.30±0.10
K0	2.00±0.10
E	1.75±0.10
F	11.50±0.10
P0	4.00±0.10
P1	20.00±0.10
P2	2.00±0.10
D0	1.50 ^{+0.10} _{-0.00}
D1	∅1.50MIN

1. 10 sprocket hole pitch cumulative tolerance ± 0.20 .
2. Carrier camber is within 1 mm in 250 mm.
3. Material : Black Conductive Polystyrene Alloy.
4. All dimensions meet EIA-481-D requirements.
5. Thickness: 0.30 ± 0.05 mm.
6. Component load per 13" reel : 1000 pcs

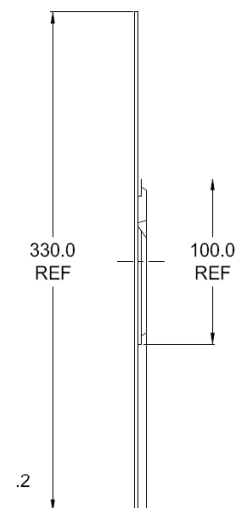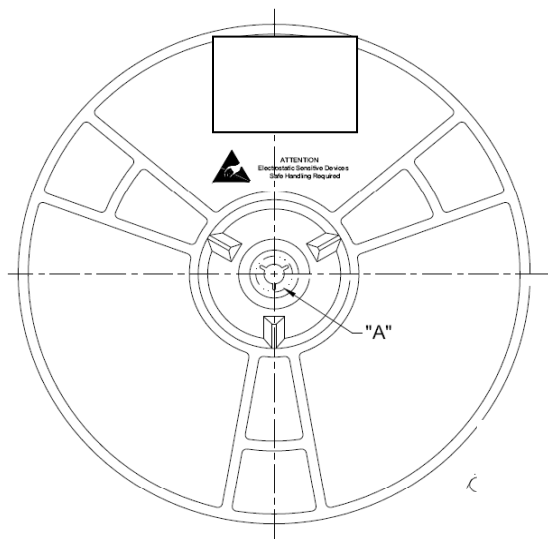

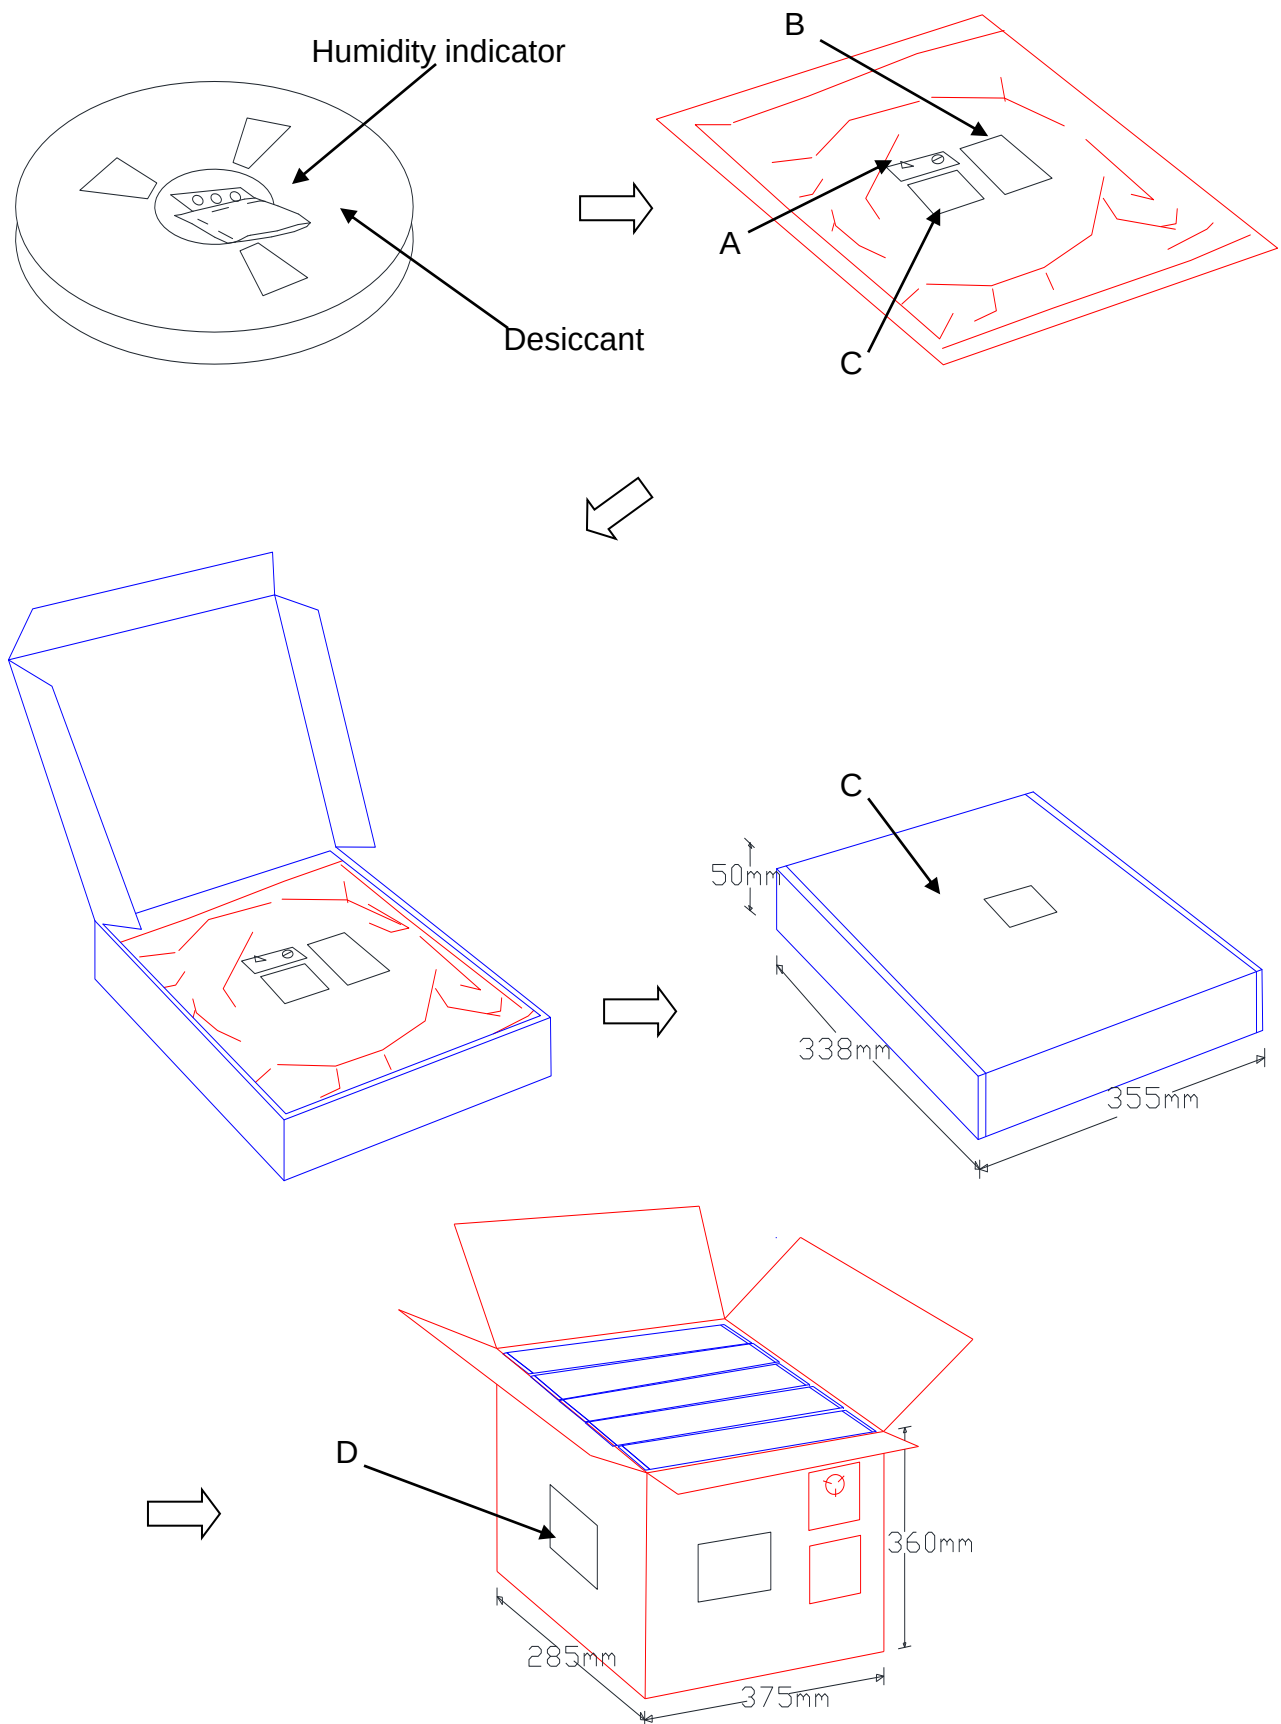

10.3 MSL Level / Storage Condition

	Caution This bag contains MOISTURE-SENSITIVE DEVICES	LEVEL 4
If blank, see adjacent bar code label		
1. Calculated shelf life in sealed bag: 12 months at $<40^{\circ}\text{C}$ and $<90\%$ relative humidity (RH)		
2. Peak package body temperature: <u>250</u> $^{\circ}\text{C}$ If blank, see adjacent bar code label		
3. After bag is opened, devices that will be subjected to reflow solder or other high temperature process must be		
a) Mounted within: <u>72</u> hours of factory conditions If blank, see adjacent bar code label		
$\leq 30^{\circ}\text{C} / 60\% \text{ RH, or}$		
b) Stored per J-STD-033		
4. Devices require bake, before mounting, if:		
a) Humidity Indicator Card reads $>10\%$ for level 2a-5a devices or $>60\%$ for level 2 devices when read at $23 \pm 5^{\circ}\text{C}$		
b) 3a or 3b are not met.		
5. If baking is required, refer to IPC/JEDEC J-STD-033 for bake procedure.		
Bag Seal Date: _____ If blank, see adjacent bar code label		
Note: Level and body temperature defined by IPC/JEDEC J-STD-020		